


WAAS CH 86439 W04A	APP CRS 043°	Rwy Ldg TDZE 1080 Apt Elev 1087
--	------------------------	---

RNAV (GPS) RWY 4
NEW CENTURY AIRCENTER (IXD)

RNP APCH - GPS.			MISSED APPROACH: Climb to 3100 direct FALOV and hold.	
Baro-VNAV and VDP NA when using OJC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use OJC altimeter setting: increase LPV DA to 1348 feet and LNAV/VNAV DA to 1448 feet and all MDA 20 feet; increase LNAV Cat C/D visibility 1/8 SM.				
ASOS 135.325	KANSAS CITY APP CON 118.9 251.075	NEW CENTURY TOWER ★ 133.0 (CTAF) 0	GND CON 124.3	UNICOM 122.95

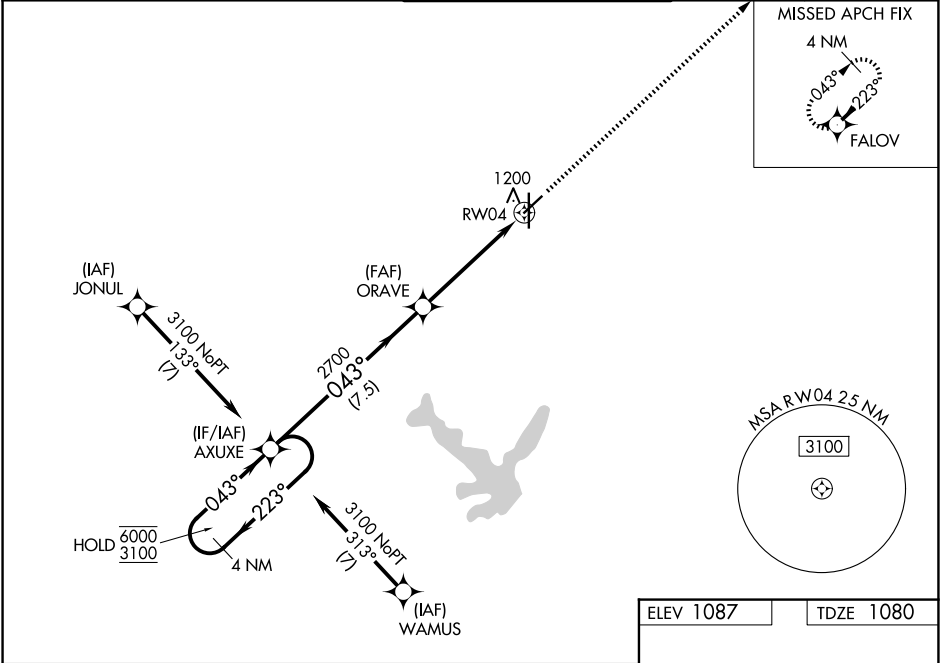

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 41).		3100	FALOV
6000 3100		AXUXE		ORAVE	
GP 3.00° TCH 41		2700		1.2 NM to RW04	
		7.5 NM		3.8 NM	1.2 NM
CATEGORY		A	B	C	D
LPV DA		1330-1 250 (300-1)			
LNAV/VNAV DA		1430-1¼ 350 (400-1¼)			
LNAV MDA		1500-1 420 (500-1)	1500-1½ 420 (500-1½)		
CIRCLING		1560-1 473 (500-1)	1580-1½ 493 (500-1½)	1640-2 553 (600-2)	

