

WAAS CH 53630 W13A	APP CRS 132°	Rwy Idg TDZE Apt Elev	5001 13 14
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 13

PALACIOS MUNI (PSX)

RNP APCH.

▼


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.

When local altimeter setting not received, use Port Lavaca altimeter setting: Increase DA to 319 feet and visibility all Cats ½ SM; increase all MDA 60 feet and LNAV Cat C/D and Circling Cat C/D visibility ¼ SM. Baro-VNAV and VDP NA when using Port Lavaca altimeter setting. Rwy 13 helicopter visibility reduction below ¾ SM NA. Circling Rwy 8, 18, 26, 31, 36 NA at night.

MISSED APPROACH:
Climb to 500 then climbing
right turn to 2100 direct
NAPTE and hold.

ASOS 118.025	HOUSTON CENTER 135.05 353.6	UNICOM 122.8 (CTAF) 0
------------------------	---------------------------------------	--

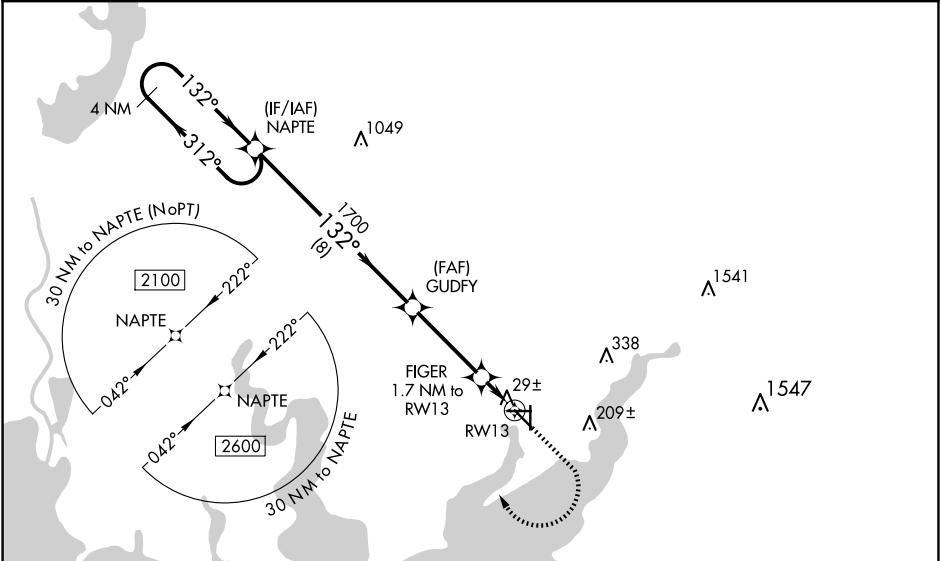

ELEV 14

TDZE 13

132°

500

2100

NAPTE

4 NM Holding Pattern

NAPTE

GUDFY

FIGER

RWY 13

*0.7 NM to RWY 13

*580

GP 3.00°

TCH 40

8 NM

3.5 NM

1 NM

0.7

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		263-7/8	250 (300-7/8)	
LNAV/VNAV DA		263-7/8	250 (300-7/8)	
LNAV MDA	280-1	267 (300-1)	280-7/8	267 (300-7/8)
CIRCLING	460-1 446 (500-1)	480-1 466 (500-1)	560-1½ 546 (600-1½)	700-2¼ 686 (700-2¼)

REIL Rwsy 13 and 31
MIRL Rwy 13-31 **0**