


WAAS CH 45523 W09B	APP CRS 087°	Rwy Ldg TDZE 13 Apt Elev 36
--	------------------------	---

RNAV (GPS) Y RWY 9L

PHILADELPHIA INTL (PHL)

RNP APCH - GPS.	MALSRL	MISSED APPROACH: Climb to 1500, then climbing right turn to 3000 direct OOD VORTAC and hold.
▼ ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to RVR 4500, all Cats. # RVR 1800 authorized with use of FD or AP or HUD to DA.		

D-ATIS 133.4	PHILADELPHIA APP CON 124.35 319.15	PHILADELPHIA TOWER 118.5 327.05 (08/26, 09L/27R, 17/35) 135.1 327.05 (09R/27L)	GND CON 121.9 348.6
------------------------	--	--	-------------------------------

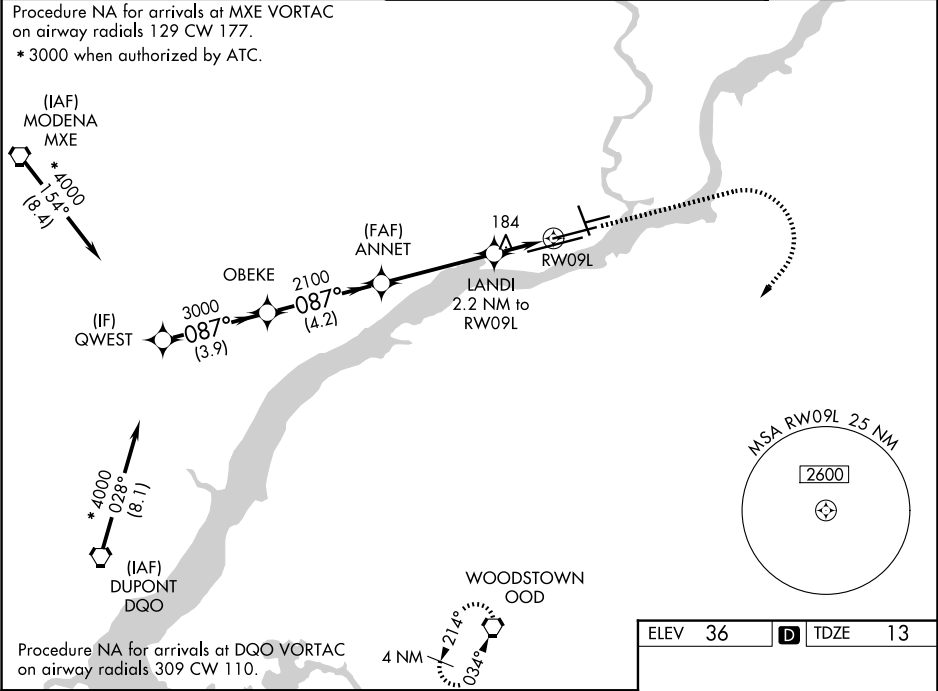

* 3000 when authorized by ATC.				
CATEGORY	A	B	C	D
LPV DA #	213/24		200 (200-½)	
LNAV/VNAV DA	325/24		312 (300-½)	
LNAV MDA	440/24 427 (500-½)		440/40 427 (500-¾)	
CIRCLING	540-1 504 (600-1)	600-1 564 (600-1)	620-1½ 584 (600-1½)	720-2¼ 684 (700-2¼)
TDZ/CL Rwy 9R HIRL all Rwy's REIL Rwy's 9L and 35				

NE-4, 25 DEC 2025 to 22 JAN 2026

NE-4, 25 DEC 2025 to 22 JAN 2026