



HI-ILS or LOC/DME RWY 21L

LOC I-EMJ 110.9	APCH CRS 213°	Rwy Idg TDZE Arprt Elev 9912 1084 1084	[USAF]	LUKE AFB (KLUF)
RADAR required * When ALS inop, increase vis to ¾ mile. ** When ALS inop, increase vis to 1½ miles.			ALS-1 A1	MISSED APPROACH: Climbing to 5000, intercept LUF TACAN R-213 to 19 DME (CESAT). Contact LUKE APP CON.
ATIS ★ 134.925 269.85	APP CON ★ 118.15 363.125	TOWER ★ 119.1 379.9	GND CON ★ 133.175 335.8	CLNC DEL ★ 126.25 273.475

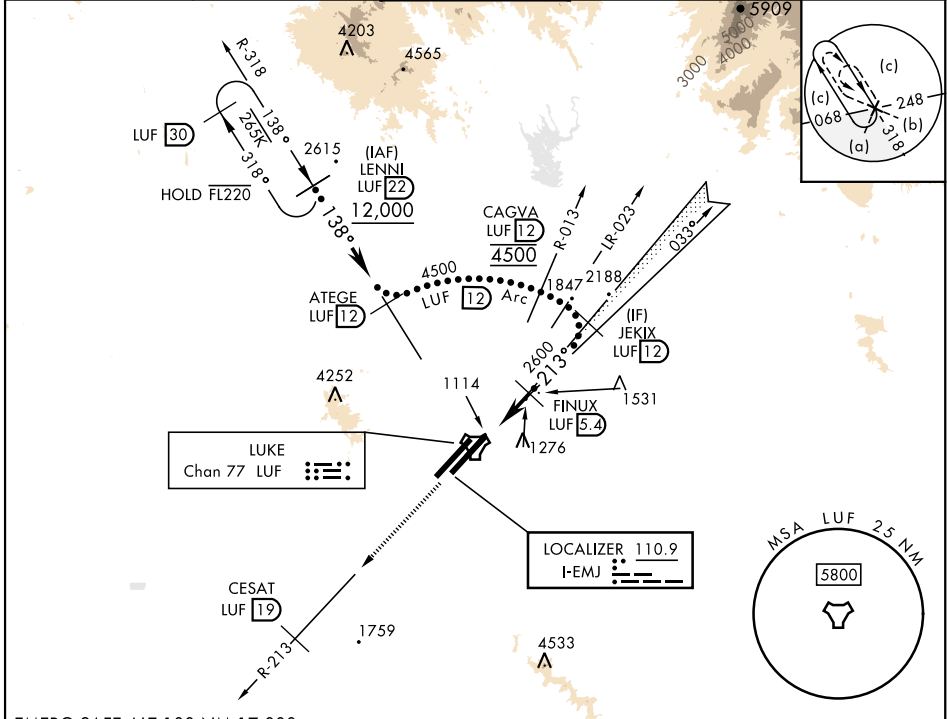

EMERG SAFE ALT 100 NM 17,000

5000 LUF R-213	CESAT LUF 19				
		FINUX LUF 5.4	JEKIX LUF 12	CAGVA R-013 LUF 12	LENNI LUF 22
		2600	3400	4500	12,000
		213°	138°		
		0.6 NM	4.0 NM		
CATEGORY	C	D	E		
S-ILS 21L ★	1284-½	200 (200-½)			
S-LOC/ DME 21L	1600-1	516 (600-1)			
SIDESTEP 21R	1600-2	516 (600-2)			
CIRCLING	NOT AUTHORIZED				

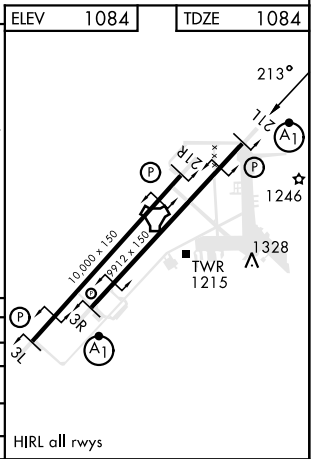

HI-ILS or LOC/DME RWY 21L