


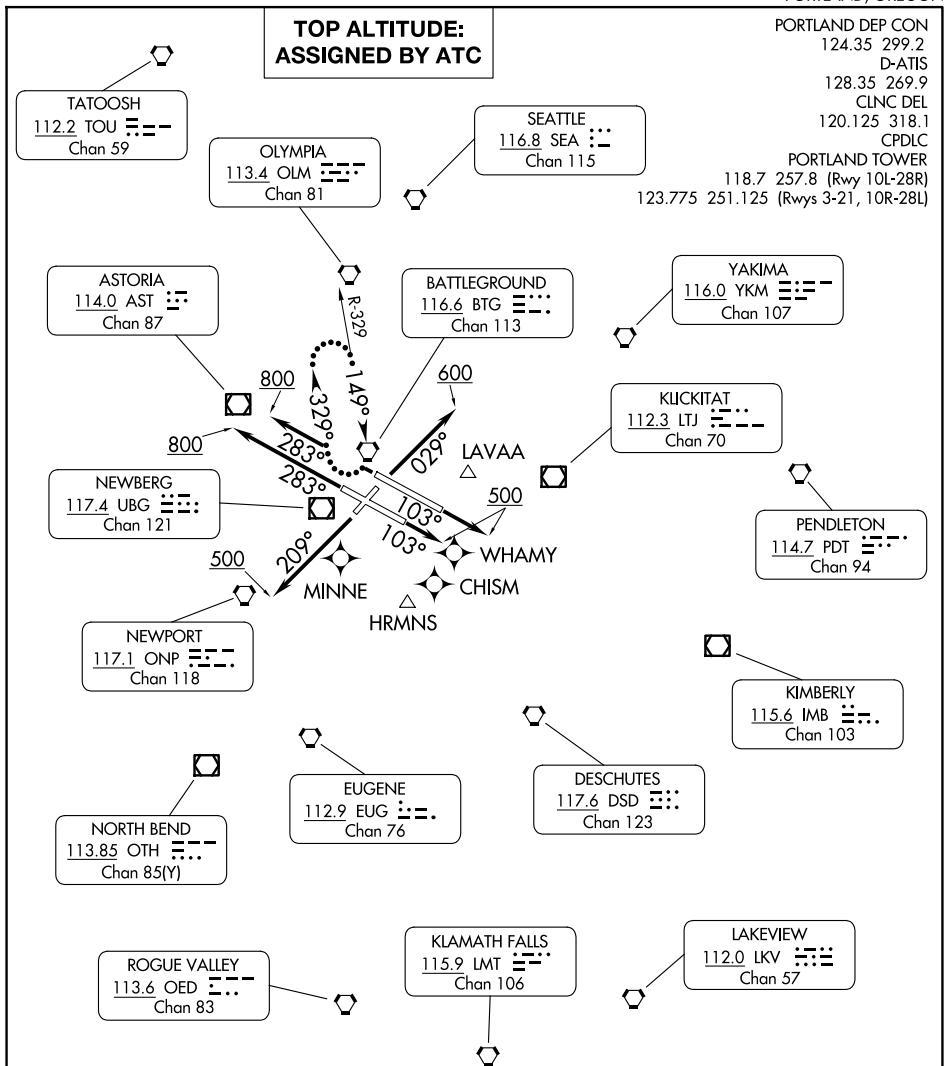

## TAKEOFF MINIMUMS

|          |                                     |                 |
|----------|-------------------------------------|-----------------|
| Rwy 3:   | Standard with minimum climb of 375' | per NM to 5300. |
| Rwy 10L: | Standard with minimum climb of 350' | per NM to 5900. |
| Rwy 10R: | Standard with minimum climb of 400' | per NM to 5000. |
| Rwy 21:  | Standard with minimum climb of 430' | per NM to 4000. |
| Rwy 28L: | Standard with minimum climb of 375' | per NM to 4500. |
| Rwy 28R: | Standard with minimum climb of 340' | per NM to 5400. |

NOTE: RADAR required.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)