


VOR RWY 5
RHODE ISLAND TF GREEN INTL (PVD)

ALSF-2

MISSED APPROACH: Climb to 800 then climbing left turn to 2500 on PVD VOR/DME R-321 to FOSTY INT/ORW 23.5 DME and hold

1174 PLIT

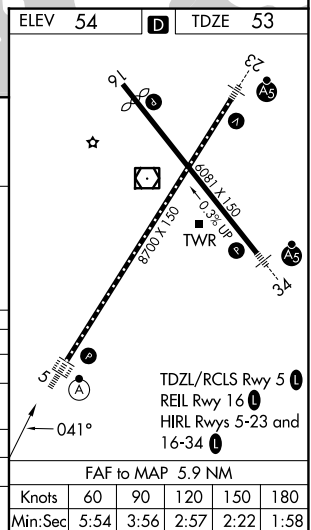

The diagram illustrates the optical path and parameters for a 2000 series lens. Key features include:

- One Minute Holding Pattern**: Indicated at the start of the optical path.
- RENCH INT PVD [6.9]**: A vertical dashed line representing a parameter.
- HODVU PVD [3]**: A vertical dashed line representing a parameter.
- Angles**: 221° and 041° are shown at the initial intersection. A 041° angle is also shown further along the path.
- Distances**: 3.00" TCH 55, 3.8 NM, 0.7 NM, and 1.4 NM are indicated.
- Values**: 2000, 760, 800, 2500, and 2.3 are shown in boxes or near specific points.
- Curves**: A curved arrow labeled PVD R-321 and a curved arrow labeled ZEKUN PVD [0.9] are shown.
- Triangle**: A small triangle symbol is present in the top right corner.

CATEGORY	A	B	C	D
S-5	760/24	707 (800-½)	760-1⅞	707 (800-1⅞)
CIRCLING	760-1	706 (800-1)	760-2 706 (800-2)	860-2½ 806 (900-2½)
HODVU FIX MINIMUMS				
S-5	560/24	507 (600-½)	560/55	507 (600-1)
CIRCLING	560-1 506 (600-1)	640-1 586 (600-1)	640-1½ 586 (600-1½)	860-2½ 806 (900-2½)

NE-1, 25 DEC 2025 to 22 JAN 2026

NE-1 25 DEC 2025 to 22 JAN 2026