

LOC/DME I-RNO 110.9 Chan 46	APP CRS 167°	Rwy Ldg 10001 TDZE 4415 Apt Elev 4415
---	------------------------	--

ILS Z or LOC Z RWY 17R
RENO/TAHOE INTL (RNO)

DME required. RNP APCH - GPS. From HOBEO or KLOCK: RF		 MALSR	MISSED APPROACH: Climb to 13000 on the RNAV missed approach route to YARKU and hold, continue climb-in-hold to 13000. *Missed approach requires minimum climb of 390 feet per NM to 8000.
   -13°C	Circling Rwy 8 NA at night. # For inop ALS, increase S-ILS 17R all Cats visibility to 2 SM. * RVR 1800 authorized with use of FD or AP or HUD to DA.		

D-ATIS	NORCAL APP CON				RENO TOWER	GND CON
135.8 363.0	119.2	279.55	126.3	353.9	118.7 257.8	121.9 348.6

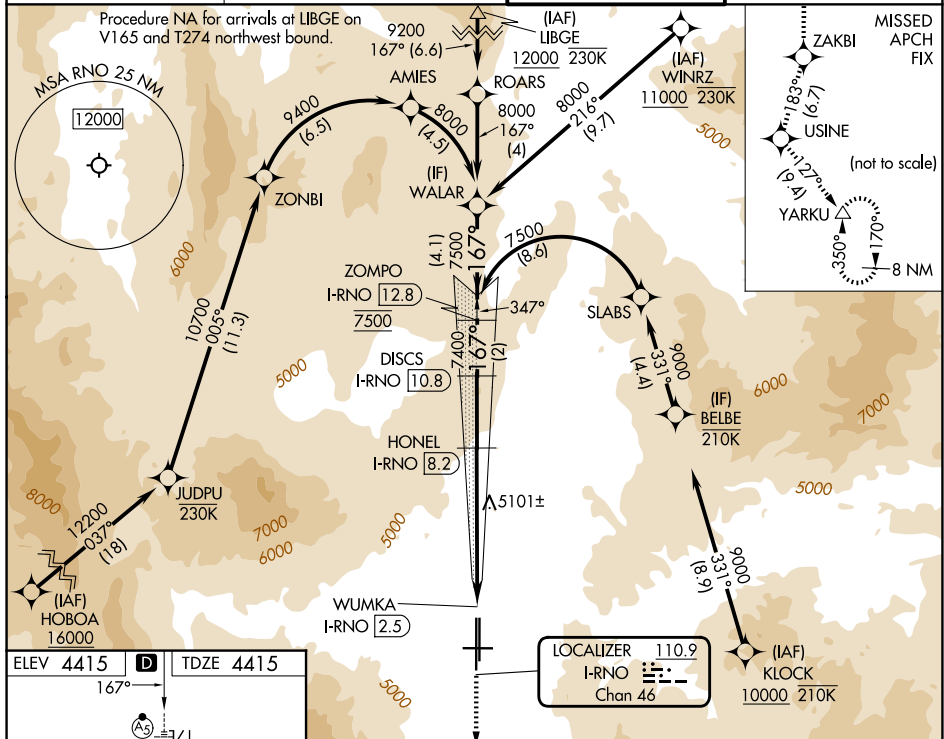


Figure 10-1 illustrates a 4th step climb profile. The diagram shows a vertical climb profile with various altitudes and distances. Key altitudes include 1100 X 1.50, 9000 X 1.50, 6102 X 1.50, 35R, and 35L. Key distances include 0.6, 2.2 NM, 3.5 NM, 2.6 NM, 2 NM, and 4.1 NM. Key altitudes include 13000, 183°, 127°, 7400, 6540, 7500, 8000, and 7500. Key altitudes include 13000, 183°, 127°, 7400, 6540, 7500, 8000, and 7500. Key altitudes include 13000, 183°, 127°, 7400, 6540, 7500, 8000, and 7500.