

WAAS
CH **45611**
W04A

APP CRS
044°

Rwy Ldg
TDZE
Apt Elev
8001
535
559

RNAV (GPS) RWY 4

FREDERICK DOUGLASS/GREATER ROCHESTER INTL (ROC)

RNP APCH - GPS.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct BILAW and hold.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV Cats C/D visibility to 1 1/2 SM.

⚠


⚠

ATIS
124.825

ROCHESTER APP CON
119.55 269.6

ROCHESTER TOWER
118.3 254.3

GND CON
121.7

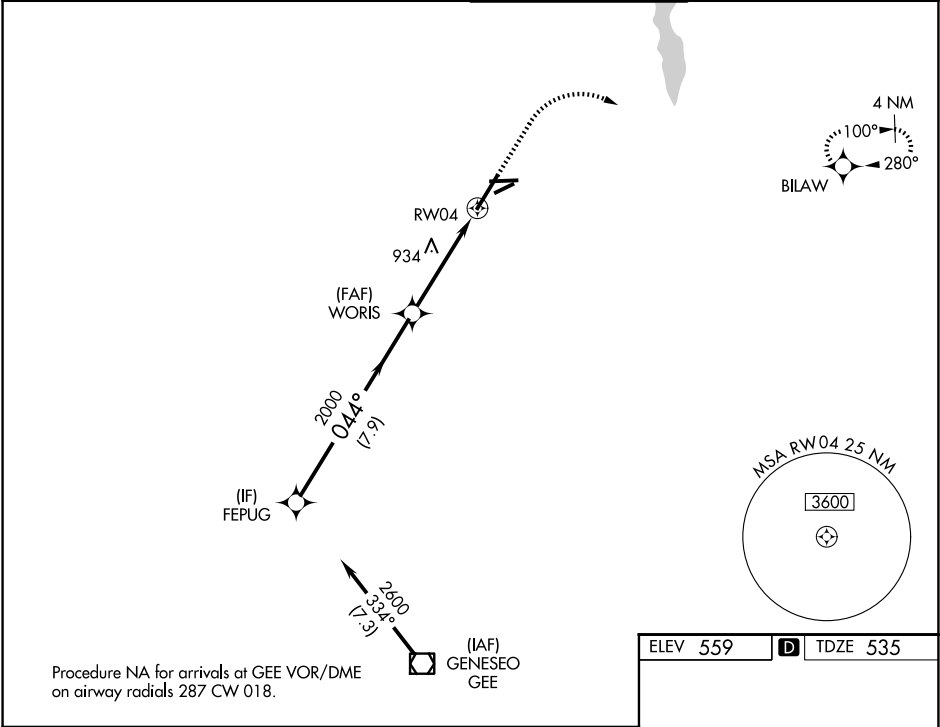

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).				
FEPUG 2600 044° 2000 WORIS 2000 1.9 NM to RWY04 RWY04 GP 3.00° TCH 56 7.9 NM 2.6 NM 1.9				
CATEGORY	A	B	C	D
LPV DA		735/18	200 (200-1/2)	
LNAV/VNAV DA		1290-2 1/4	755 (800-2 1/4)	
LNAV MDA	1200/24	665 (700-1/2)	1200-1 1/2	665 (700-1 1/2)
CIRCLING	1200-1	641 (700-1)	1500-2 3/4 941 (1000-2 3/4)	1500-3 941 (1000-3)

1500

3000

BILAW

6402 X 1500

4000 X 100

TWR

28

044°

0.3% UP

0.3% DOWN

8001-1500

01

02

03

04

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

TDZ/CL Rwy 4

REIL Rws 7, 10 and 25

MIRL Rwy 7-25

HIRL Rws 10-28 and 4-22