

CHUUC SIX DEPARTURE (RNAV)

AL-360 (FAA)

ST LOUIS LAMBERT INTL (STL)

ST. LOUIS, MISSOURI

D-ATIS
125.025 379.925

CLNC DEL

119.5 363.1

CPDLC

GND CON

121.9 348.6 (Inbound)

121.65 377.175 (Outbound)

118.925 227.125 (Rwy 11/29)

ST. LOUIS TOWER

120.05 284.6 (Rwys 12L/30R, 24)


118.5 257.7 (Rwy 12R/30L)

132.475 239.275 (Rwys 6, 11/29)

ST. LOUIS DEP CON

128.1 307.05

TOP ALTITUDE:
5000

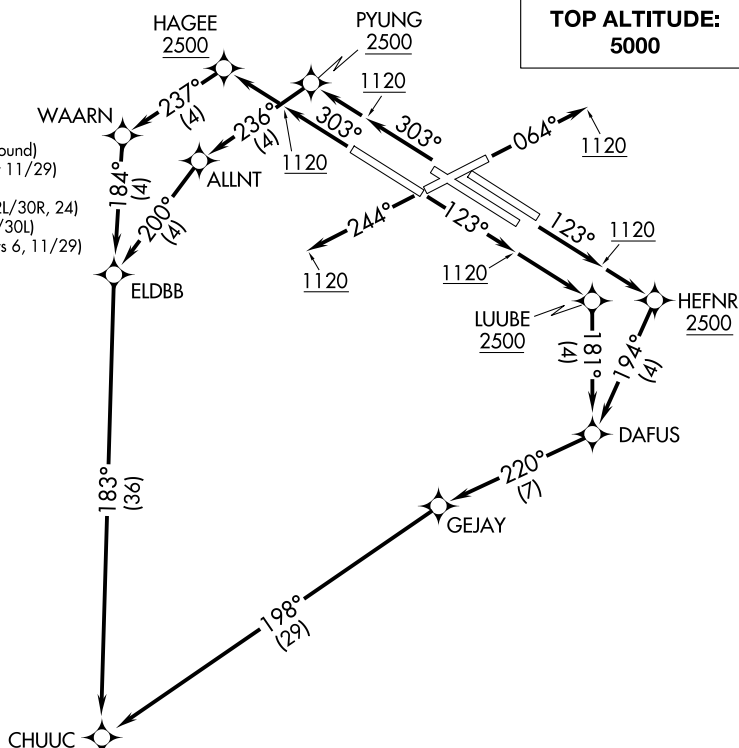

NOTE: RNAV 1.

NOTE: DME/DME/IRU or GPS required.

NOTE: RADAR required.

NOTE: For use by turbojet aircraft only.

TAKEOFF MINIMUMS

Rwy 6: Standard with minimum climb of 500' per NM to 1120 then minimum climb of 240' per NM to 5000.

Rwy 24: Standard with minimum climb of 500' per NM to 1120 then minimum climb of 260' per NM to 5000.

Rwy 11: Standard with minimum climb of 500' per NM to LUUBE.

Rwys 12L/R: Standard with minimum climb of 500' per NM to
HEFNR.

Rwy 29: Standard with minimum climb of 500' per NM to HAGEE.

Rwys 30L/R: Standard with minimum climb of 500' per NM to
PYUNG.

WALNUT RIDGE
ARG

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

CHUUC SIX DEPARTURE (RNAV)

ST. LOUIS, MISSOURI

ST LOUIS LAMBERT INTL (STL)

(CHUUC6.CHUUC) 19MAY22

NC-3, 25 DEC 2025 to 22 JAN 2026

NC-3, 25 DEC 2025 to 22 JAN 2026