



LOC/DME I-RQN 111.95 Chan 56(Y)	APP CRS 303°	Rwy Ldg TDZE Apt Elev 9000 580 618
---	------------------------	--

ILS or LOC RWY 29
ST LOUIS LAMBERT INTL (STL)

RADAR required for procedure entry. DME or RADAR required.			ALSF-2 	MISSED APPROACH: Climb to 1040 then climbing left turn to 3000 on heading 286° and on TOY VORTAC R-272 to HULSO/TOY 36.7 DME and hold.
▼ Simultaneous approach authorized with Rwy 30R/L. Autopilot coupled approach NA. Rwy 29 helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-ILS Cat E visibility to RVR 4000, increase S-LOC Cats A/B visibility to RVR 5500, and Cat C/D/E to RVR 6000.				
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 132.475 239.275	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1 CPDLC

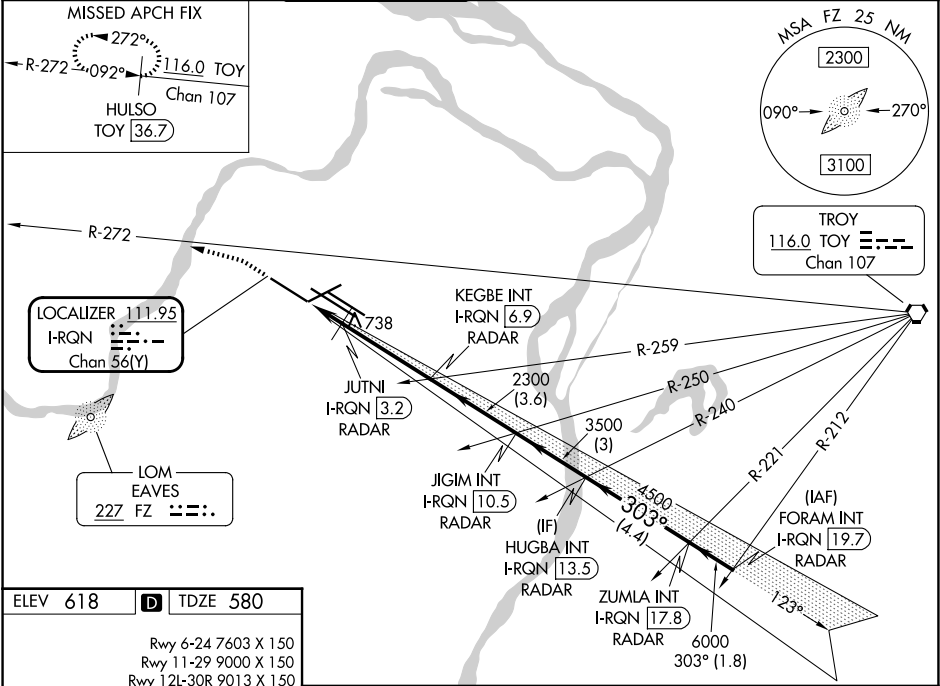

ELEV 618	D	TDZE 580
Rwy 6-24 7603 X 150 Rwy 11-29 9000 X 150 Rwy 12L-30R 9013 X 150 Rwy 12R-30L 11020 X 150		
HIRL all Rwy TDZ/CL Rwy 11, 12L, 12R, 29, and 30R FAF to MAP 5.2 NM		
Knots	60	90 120 150 180
Min:Sec	5:12	3:28 2:36 2:05 1:44

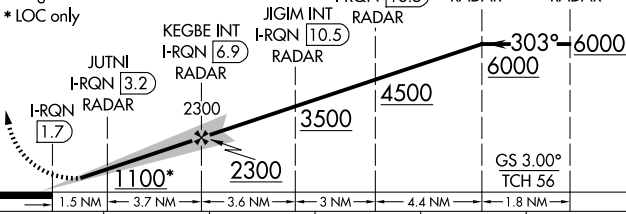1040	3000	TOY R-272	HULSO TOY 36.7			VGSI and ILS glidepath not coincident (VGSI Angle 3.00/ TCH 73).				
										
Disregard OM indications. * LOC only										
										
CATEGORY						A	B	C	D	E
S-ILS 29						780/18 200 (200-½)				
S-LOC 29						980/40 400 (400-¾)				

NC-3, 25 DEC 2025 to 22 JAN 2026

NC-3, 25 DEC 2025 to 22 JAN 2026