


WAAS CH 87021 W24A	APP CRS 244°	Rwy Ldg TDZE Apt Elev	7603 534 617
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24

ST LOUIS LAMBERT INTL (STL)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV Cat E visibility to 1 3⁄8 SM and LNAV Cat E visibility to 1 3⁄8 SM.				MALS 	MISSED APPROACH: Climb to 3000 direct SORUE and on track 294° to AUGST and hold.
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC

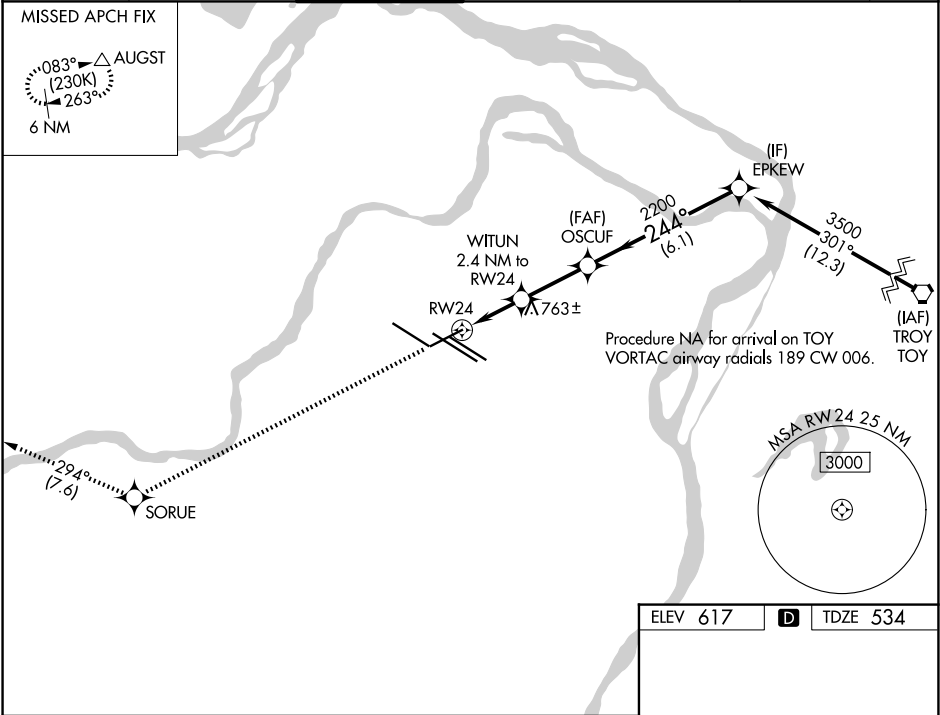

3000 ↑	SORUE ✧	tr 294°	AUGST △			
				WITUN 2.4 NM to RW24	OSCUF 2200	EPKEW 3500
				1.5 NM to RW24	2200	GP 3.00° TCH 50
				1340	244°	
				1.5 NM	0.9 NM	2.7 NM
				6.1 NM		
CATEGORY	A	B	C	D	E	
LPV DA	734/40 200 (200-¾)					
LNAV/ VNAV DA	1015/60 481 (400-1¼)					
LNAV MDA	1080/40 546 (500-¾)			1080-1⅜ 546 (500-1⅝)		

