

WAAS CH 93747 W06A	APP CRS 064°	Rwy Ldg TDZE Apt Elev	7323 551 617
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

ST LOUIS LAMBERT INTL (STL)

RNP APCH - GPS.


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 6 helicopter visibility reduction below RVR 4000 NA. For inop ALS increase LPV all Cats visibility to RVR 5500; LNAV/VNAV all Cats visibility to 1½ SM; LNAV Cat A and B visibility to RVR 5500; and LNAV Cat C, D, and E visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct VELVT and hold, continue climb-in-hold to 3000.

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 132.475 239.275	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	---	---	--------------------------------	-------

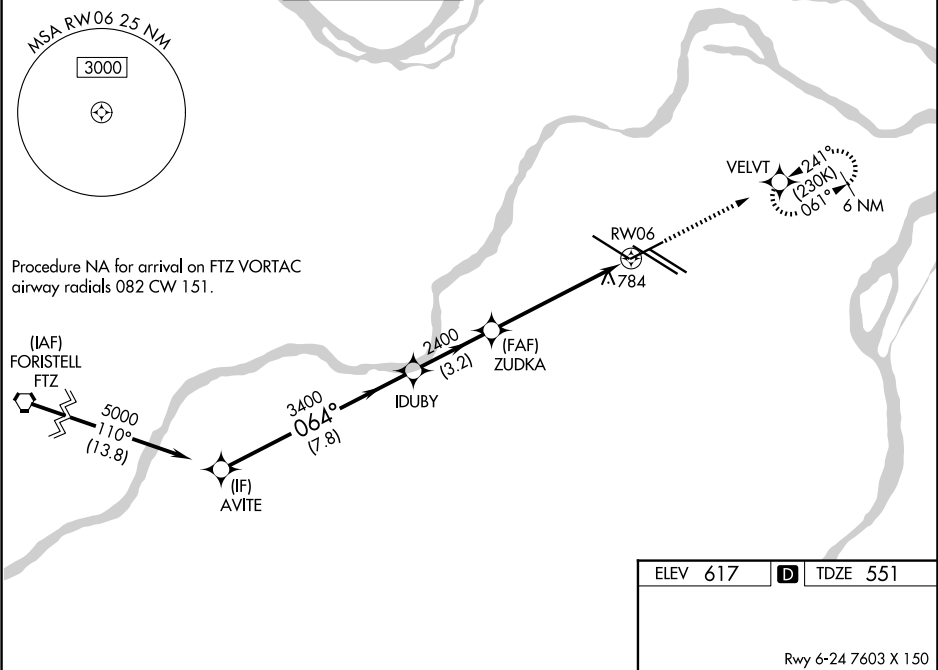

GP 3.00°
TCH 54

AVITE

IDUBY

ZUDKA

3000

VELVT

5000

064°

3400

2400

1.4 NM to RWY06

RWY06

7.8 NM

3.2 NM

4.3 NM

1.4

CATEGORY	A	B	C	D	E
LPV DA	910/40 359 (300-¾)				
LNAV/VNAV DA	1040/50 489 (500-1)				
LNAV MDA	1040/40 489 (500-¾)		1040/50 489 (500-1)		

ELEV 617

D

TDZE 551

Rwy 6-24 7603 X 150

Rwy 11-29 9000 X 150

Rwy 12L-30R 9013 X 150

Rwy 12R-30L 11020 X 150

HIRL all Rwys
TDZ/CL Rwys 11, 12L, 12R, 29, and 30R