

LOC/DME I-GWQ	APP CRS	Rwy Ldg	28R	28L
111.7	284°	TDZE	11236	10275
Chan 54		Apt Elev	13	13

ILS or LOC RWY 28R

SAN FRANCISCO INTL (SFO)

RNAV 1-GPS or RADAR required for procedure entry.

▼

▲

Circling NA to Rwy's 10L, 10R, 19L, and 19R. Circling Rwy 1L, 1R NA at night. LOC procedure NA during simultaneous operations. For inop ALS increase S-LOC 28R* Cat C/D visibility to 1 1/2 SM. Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glideslope.

ALSF-2

Rwy 28R


MALSR

Rwy 28L

MISSED APPROACH: Climb to 3000 on SFO VOR/DME R-281 to VIKYU INT/SFO 12 DME and hold.

*Missed approach requires minimum climb of 350 feet per NM to 1900; if unable to meet climb gradient, see ILS or LOC RWY 28L.

D-ATIS 113.7 115.8 118.85	NORCAL APP CON 134.5 338.2	SAN FRANCISCO TOWER 120.5 269.1	GND CON 121.8	CLNC DEL 118.2	CPDLC
---------------------------------	-------------------------------	------------------------------------	------------------	-------------------	-------

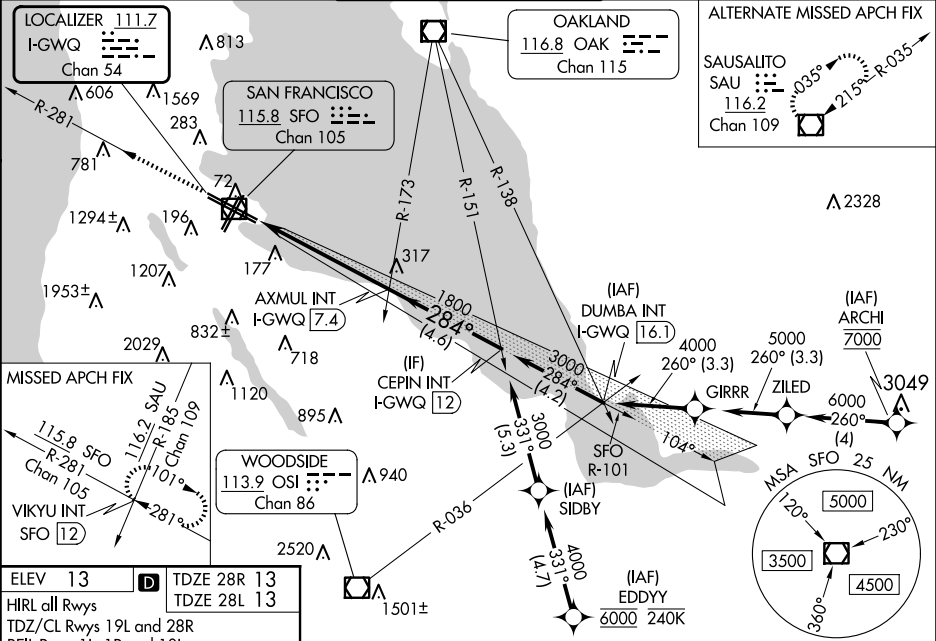

ELEV 13

TDZE 28R 13

TDZE 28L 13

HIRL all Rwy's

TDZ/CL Rwy's 19L and 28R

REIL Rwy's 1L, 1R and 10L

FAF to MAP 5.4 NM

Knots 60 90 120 150 180

Min:Sec 5:24 3:36 2:42 2:10 1:48

CATEGORY			
S-ILS 28R*			
S-LOC 28R*			
SIDESTEP* 28L			
CIRCLING			