


|                                                      |                        |                                                 |
|------------------------------------------------------|------------------------|-------------------------------------------------|
| LOC/DME I-SNA<br><b>111.75</b><br>Chan <b>54</b> (Y) | APP CRS<br><b>016°</b> | Rwy Ldg<br>TDZE <b>56</b><br>Apt Elev <b>56</b> |
|------------------------------------------------------|------------------------|-------------------------------------------------|

LOC BC RWY 2L  
JOHN WAYNE/ORANGE COUNTY (SNA)

|                                                                                                               |                                                                                           |
|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
|  Circling Rwy 20L NA at night. | MISSED APPROACH: Climb to 800 then climbing left turn to 2600 direct SLI VORTAC and hold. |
|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|

|                        |                                     |                                                           |                         |                         |
|------------------------|-------------------------------------|-----------------------------------------------------------|-------------------------|-------------------------|
| D-ATIS<br><b>126.0</b> | SOCAL APP CON<br><b>121.3 263.1</b> | JOHN WAYNE TOWER★<br><b>126.8</b> (CTAF) <b>0 343.625</b> | GND CON<br><b>120.8</b> | UNICOM<br><b>122.95</b> |
|------------------------|-------------------------------------|-----------------------------------------------------------|-------------------------|-------------------------|

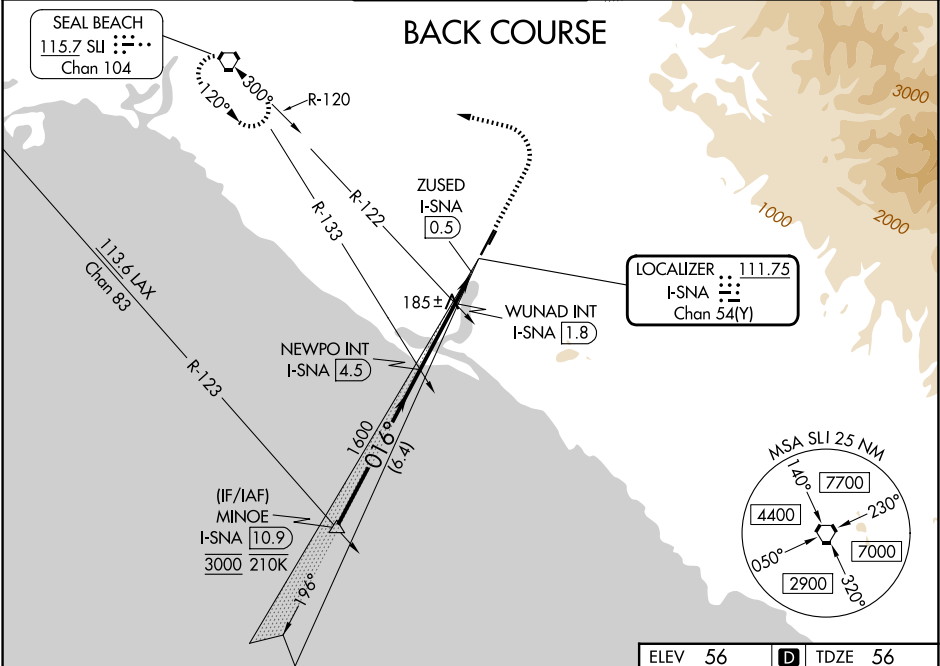

|                                                         |       |                                                                     |                              |                         |           |         |
|---------------------------------------------------------|-------|---------------------------------------------------------------------|------------------------------|-------------------------|-----------|---------|
| MINOE<br>I-SNA 10.9                                     |       | VGSI and descent angles not coincident<br>(VGSI Angle 3.00/TCH 75). |                              | 800<br>↑                | 2600<br>↷ | SLI<br> |
| NEWPO INT<br>I-SNA 4.5                                  |       | WUNAD INT<br>I-SNA 1.8                                              |                              | I-SNA DME ANTENNA       |           |         |
| ZUSED<br>I-SNA 0.5                                      |       | Disregard GS indications.                                           |                              | 560                     |           |         |
| 3000                                                    |       | 016°                                                                |                              | 1600                    |           |         |
| 6.4 NM                                                  |       | 2.7 NM                                                              |                              | 1.3 NM                  |           | 0.7     |
| CATEGORY                                                | A     | B                                                                   | C                            | D                       |           |         |
| S-LOC 2L                                                | 560-1 | 504 (600-1)                                                         | 560-1 3/8                    | 504 (600-1 3/8)         |           |         |
| CIRCLING                                                | 640-1 | 584 (600-1)                                                         | 840-2 1/4<br>784 (800-2 1/4) | 1180-3<br>1124 (1200-3) |           |         |
| WUNAD FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED) |       |                                                                     |                              |                         |           |         |
| S-LOC 2L                                                | 480-1 | 424 (500-1)                                                         | 480-1 1/4                    | 424 (500-1 1/4)         |           |         |
| CIRCLING                                                | 640-1 | 584 (600-1)                                                         | 840-2 1/4<br>784 (800-2 1/4) | 1180-3<br>1124 (1200-3) |           |         |
| FAF to MAP 3.9 NM                                       |       |                                                                     |                              |                         |           |         |
| Knots                                                   | 60    | 90                                                                  | 120                          | 150                     | 180       |         |
| Min:Sec                                                 | 3:54  | 2:36                                                                | 1:57                         | 1:34                    | 1:18      |         |

REIL Rwy 20L  
MIRL Rwy 2R-20L  
HIRL Rwy 2L-20R