


WAAS CH 93847 W02A	APP CRS 016°	Rwy Ldg TDZE Apt Elev	5700 56 56
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 2L
JOHN WAYNE/ORANGE COUNTY (SNA)

RNP APCH - GPS.	MISSED APPROACH: Climb to 800 then climbing left turn to 2600 direct SLI VORTAC and hold.
Circling Rwy 20L NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C.	

D-ATIS 126.0	SOCAL APP CON 121.3 263.1	JOHN WAYNE TOWER ★ 126.8 (CTAF) 0 343.625	GND CON 120.8	UNICOM 122.95
------------------------	-------------------------------------	---	-------------------------	-------------------------

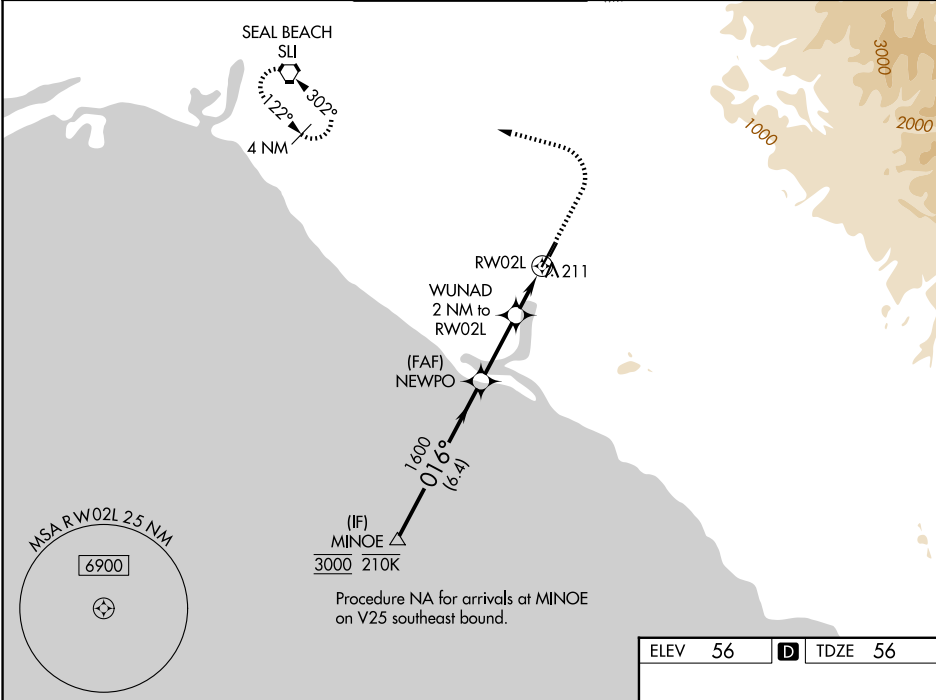

MINOE		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).		800	2600	SLI
3000		NEWPO		1600	1600	
GP 3.00°		WUNAD 2 NM to RWY 2L		1.2 NM to RWY 2L	1.2 NM	
TCH 55		RWY 2L				
6.4 NM		2.7 NM		0.8 NM	1.2 NM	
CATEGORY	A	B	C	D		
LPV DA	306-¾		250 (300-¾)			
LNAV/VNAV DA	380-1		324 (400-1)			
LNAV MDA	520-1	464 (500-1)	520-1⅞	464 (500-1⅞)		
CIRCLING	640-1	584 (600-1)	840-2¼ 784 (800-2¼)	1180-3 1124 (1200-3)		

