

LOC/DME I-SBA 110.3 Chan 40	APP CRS 075°	Rwy Ldg TDZE 13 Apt Elev 14
---	------------------------	---


ILS or LOC RWY 7
SANTA BARBARA MUNI (SBA)

⚠ VDP NA when using OXR altimeter setting. Circling Rwy 15L/R and 33L/R NA at night. When local altimeter setting not received, use OXR altimeter setting: increase DA to 296 feet; increase all MDAs 100 feet and S-LOC 7 visibility Cats C and D to 1½ SM, Circling Cat A visibility to 1¼ SM and Circling visibility Cat C to 2½ SM. For inop ALS, when using OXR altimeter setting, increase S-ILS 7 all Cats visibility to RVR 4500 and S-LOC 7 Cats C and D visibility to 1½ SM. Circling NA for Cats C and D north of Rwy 7-25.
* RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using OXR altimeter setting).

MALS R

MISSED APPROACH:
Climb to 700 then climbing right turn to 4000 on RZS VORTAC R-185 to GOLET INT/RZS 14.4 DME and hold, continue climb-in-hold to 4000.

ATIS 132.65	SANTA BARBARA APP CON★ 120.55 319.15 (151°-329°) 125.4 291.1 (330°-150°)	SANTA BARBARA TOWER★ 119.7 (CTAF) 0 254.35	GND CON 121.7	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

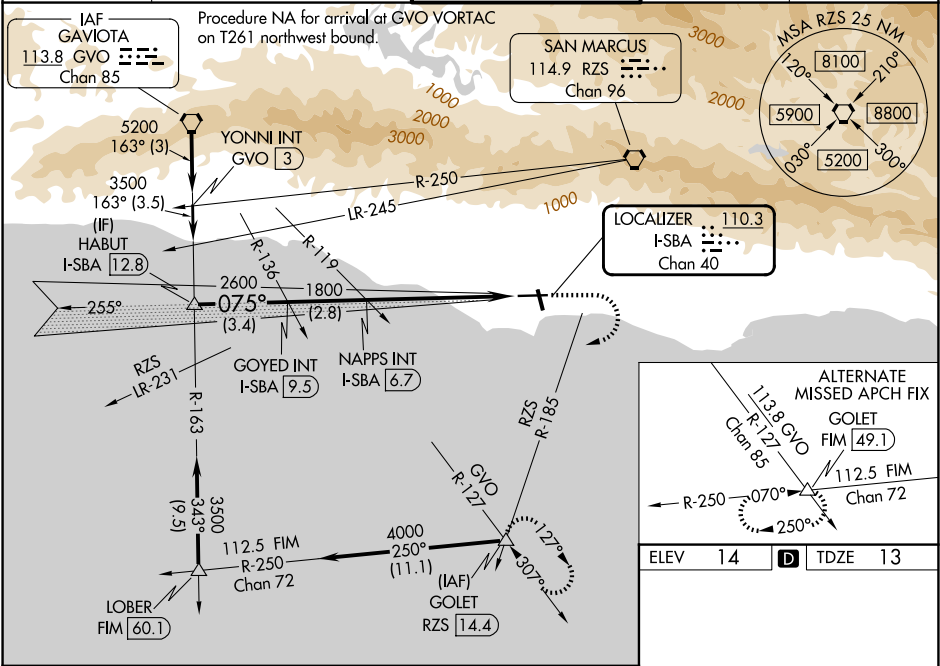

	HABUT I-SBA [12.8]	GOYED INT I-SBA [9.5]	NAPPS INT I-SBA [6.7]	700 ↑	4000 RZS R-185	GOLET △
	3500	2600	1800	1800	I-SBA [2.8]	I-SBA [1.2]
	GS 3.00° TCH 52					
	3.4 NM	2.8 NM	3.9 NM	1.6 NM		
CATEGORY	A	B	C	D		
S-ILS 7*	213/24 200 (200-½)					
S-LOC 7	560/24	547 (600-½)	560/60	547 (600-1¼)		
CIRCLING	800-1 786 (800-1)	840-1¼ 826 (900-1¼)	840-2½ 826 (900-2½)	1000-3 986 (1000-3)		

ELEV 14 **D** TDZE 13

HIRL Rwy 7-25 **1**
MIRL Rwy 15R-33L **1**
REIL Rws 15R and 25 **1**

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

SW-3, 25 DEC 2025 to 22 JAN 2026

SW-3, 25 DEC 2025 to 22 JAN 2026