


LOC/DME I-SEM 110.5 Chan 42	APP CRS 329°	Rwy Ldg TDZE 165 Apt Elev 166
---	------------------------	---


ILS Y or LOC Y RWY 33
CRAIG FLD (SEM)

ADF required. RNP APCH - GPS.	MALS Ⓜ	MISSED APPROACH: Climb to 1000 then climbing left turn to 3100 direct POLK LOM/6.2 DME/RADAR and hold, continue climb-in-hold to 3100.
⚠ NA Inop table does not apply to S-ILS 33. For inoperative ALS, increase S-LOC 33 Cat E visibility to 1 1/2 SM and ZEMUM fix minimums S-LOC 33 Cats C-E visibility to 1 1/2 SM.		

AWOS-3PT 119.15	MONTGOMERY APP CON ★ 124.0 363.025	CRAIG TOWER★ 120.85	GND CON 121.675	UNICOM 122.7 (CTAF) ①
---------------------------	--	-------------------------------	---------------------------	---------------------------------

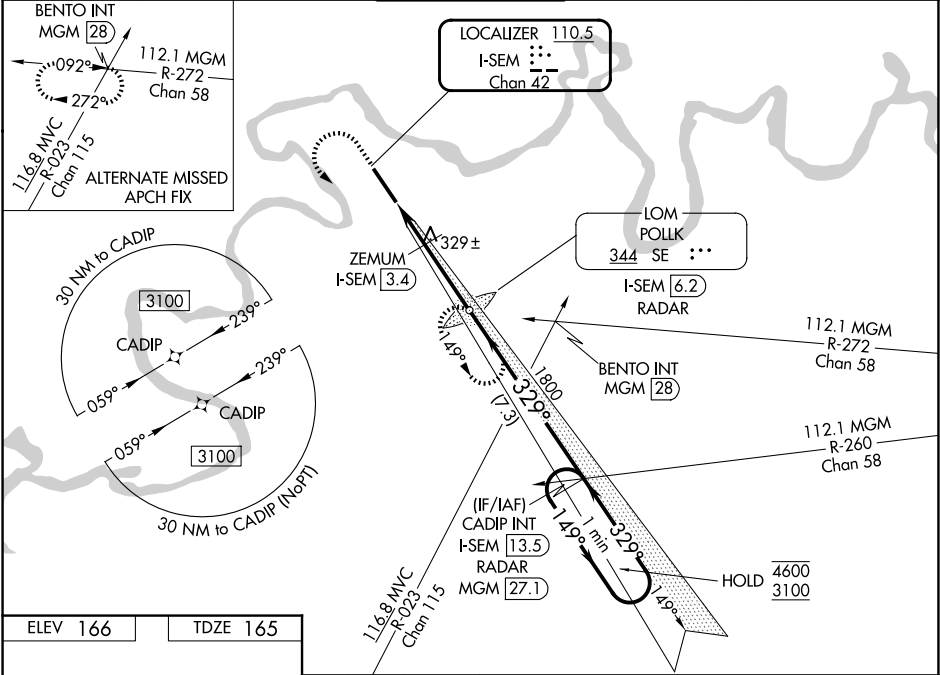

ELEV 166	TDZE 165
-----------------	-----------------

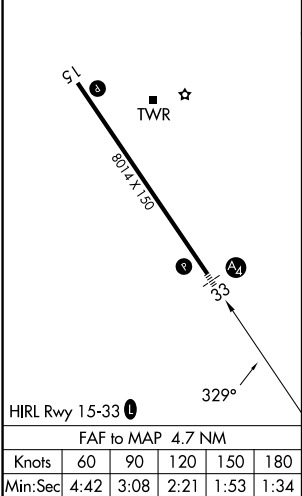

1000	3100	SE	SE LOM POLK I-SEM [6.2] RADAR	CADIP INT I-SEM [13.5] RADAR	One Minute Holding Pattern
			ZEMUM I-SEM [3.4]		
			I-SEM [2.6]		
			I-SEM [1.5]		
			1.1 NM	0.8	2.8 NM
			720	1750	329°
			1800	4600	3100
			GS 3.00°	TCH 55	
CATEGORY	A	B	C	D	E
S-ILS 33	365-3/4	200 (200-3/4)			415-3/4 250 (300-3/4)
S-LOC 33	720-3/4	555 (600-3/4)	720-1 3/8	555 (600-1 3/8)	
CIRCLING	720-1 554 (600-1)	760-1 594 (600-1)	760-1 3/8 594 (600-1 3/8)	1040-2 3/4 874 (900-2 3/4)	1040-3 874 (900-3)
	ZEMUM FIX MINIMUMS				
S-LOC 33	580-3/4	415 (500-3/4)	580-1	415 (500-1)	
CIRCLING	660-1 494 (500-1)	760-1 594 (600-1)	760-1 1/2 594 (600-1 1/2)	1040-2 3/4 874 (900-2 3/4)	1040-3 874 (900-3)

SE-4, 25 DEC 2025 to 22 JAN 2026

SE-4, 25 DEC 2025 to 22 JAN 2026