

LOC/DME I-SHR	APP CRS	Rwy Ldg	8301
108.7	326°	TDZE	3985
Chan 24		Apt Elev	4021

ILS or LOC/DME RWY 33



SHERIDAN COUNTY (SHR)

When local altimeter setting not received, procedure NA.
Night landing: Rwy 24 NA. For inoperative MALSR, increase S-LOC 33 Cats C and D visibility to ¾ mile.

MALSR

MISSED APPROACH: Climb to 7000 on heading 326° and on SHR VOR/DME R-127 to SHR VOR/DME and hold, continue climb-in-hold to 7000.

ASOS	SALT LAKE CENTER	UNICOM
135.175	127.75 351.9	123.0 (CTAF) 0

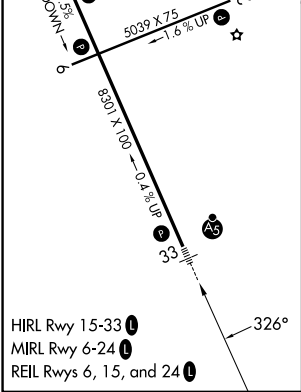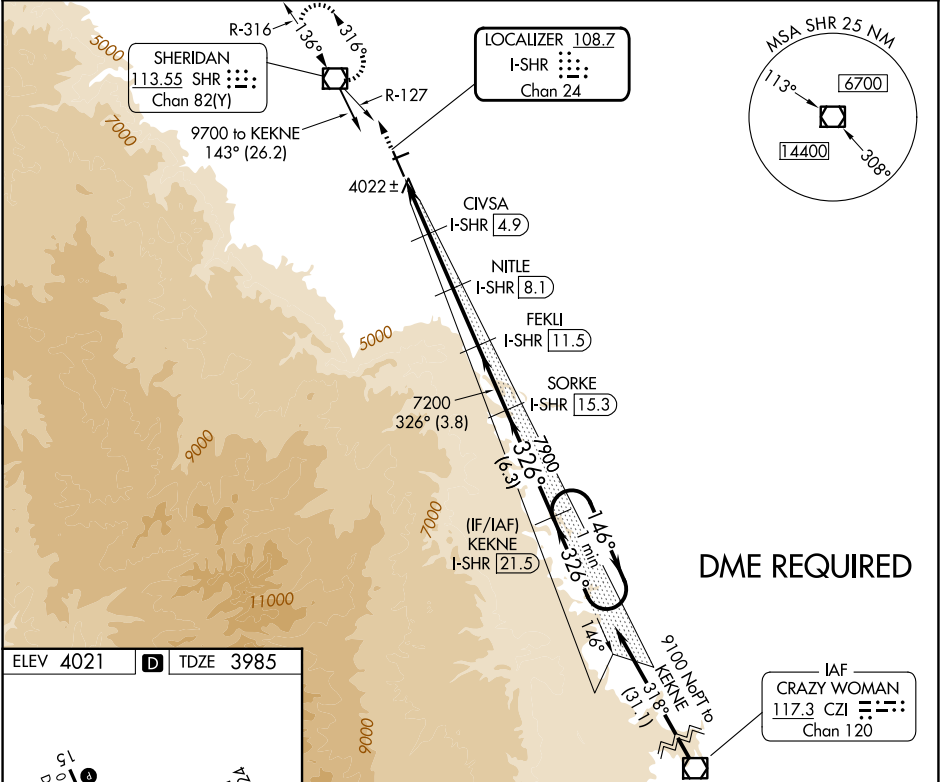

7000	SHR	SHR	Use I-SHR DME when on the localizer course.			
hdg 326°	R-127		FEKLI I-SHR 11.5	SORKE I-SHR 15.3	KEKNE I-SHR 21.5	One Minute Holding Pattern
*LOC only.	CIVSA I-SHR 4.9	NITLE I-SHR 8.1	7200	7200	7200	
I-SHR 1.5	I-SHR 2.3	I-SHR 1.5	5100	6100*	7200	
0.8	2.6 NM	3.2 NM	3.4 NM	3.8 NM	6.3 NM	
CATEGORY	A	B	C	D		
S-ILS 33		4185-½	200 (200-½)			
S-LOC 33		4280-½	295 (300-½)			
CIRCLING	4600-1 579 (600-1)	4640-1 619 (700-1)	4860-2½ 839 (900-2½)	5220-3 1199 (1200-3)		