


WAAS Ch 53699 W22A	APP CRS 220°	Rwy Ldg 6602 TDZE 384 Apt Elev 390
--	------------------------	---

RNAV (GPS) RWY 22
TEXARKANA RGNL-WEBB FLD (TXK)

▼ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). When local altimeter setting not received, ▲ use J Lynn Helms Sevier County altimeter setting and increase all DA/MDA 100 feet, increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ½ mile, LNAV and circling Cat C and D visibility ¼ mile. Baro-VNAV and VDP NA when using J Lynn Helms Sevier County altimeter setting. For inoperative MALSR when using J Lynn Helms Sevier County altimeter setting increase LPV all Cats visibility to 1¼.		MALSR 	MISSED APPROACH: Climb to 2000 direct YOBUG and hold.
ATIS 120.2	FORT WORTH CENTER 123.925 269.475	TEXARKANA TOWER ★ 123.875 (CTAF) 0 235,625	GND CON 119,225

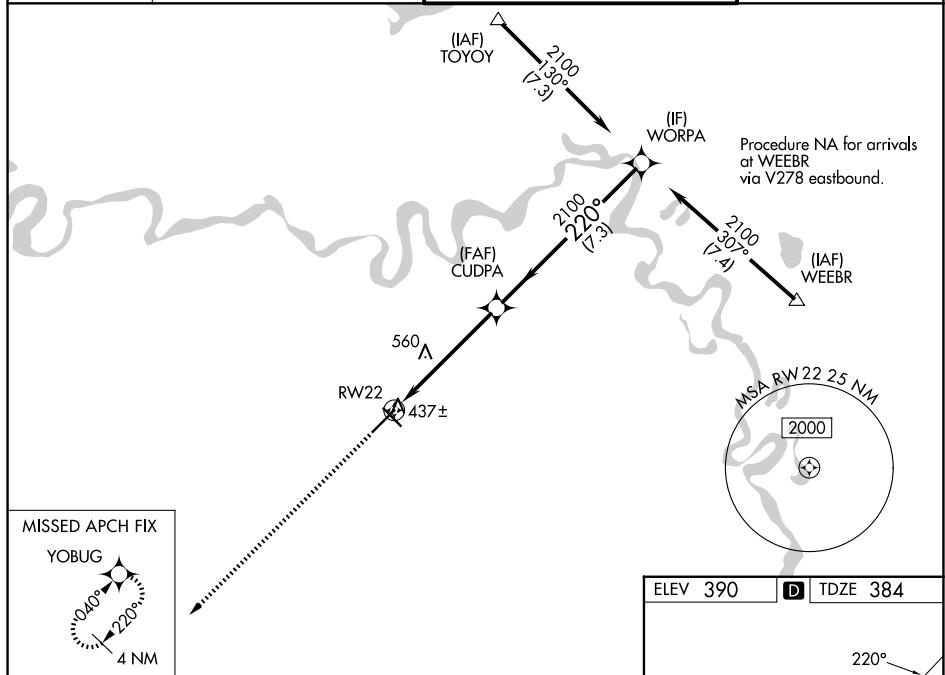

2000

YOBUG

CUDPA

WORPA

Procedure Turn NA

* LNAV only.

1.2 NM

4 NM

7.3 NM

220°

2100

2100

GP 3.00°

TCH 45°

CATEGORY	A	B	C	D
LPV DA	634-1/2	250 (300-1/2)		
LNAV/DA	687-1/2	303 (300-1/2)		687-3/4
VNAV				303 (300-3/4)
LNAV MDA	820-1/2	436 (500-1/2)	820-3/4	820-1
			436 (500-3/4)	436 (500-1)
CIRCLING	820-1	900-1	1000-13/4	1080-2 1/4
	430 (500-1)	510 (600-1)	610 (700-13/4)	690 (700-2 1/4)

ELEV 390 TDZE 384

220°

13 22

TWR

600 x 150 5200 x 100

0.7% UP 0.5% UP

MIRL Rwy 13-31

HIRL Rwy 4-22