



|            |         |          |      |
|------------|---------|----------|------|
| VORTAC TXK | APP CRS | Rwy Ldg  | 4559 |
| 116.3      | 122°    | TDZE     | 388  |
| Chan 110   |         | Apt Elev | 390  |

VOR RWY 13  
TEXARKANA RGNL-WEBB FLD (TXK)

⚠ When local altimeter setting not received, use De Queen altimeter setting and increase all MDA 100 feet, increase S-13 and Cat C and D visibility ¼ SM, and Circling Cat C and D visibility ¼ SM. Visibility reduction by helicopters NA. VDP NA when using De Queen altimeter setting.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct TXK VORTAC and hold.

|               |                                      |                                               |                    |
|---------------|--------------------------------------|-----------------------------------------------|--------------------|
| ATIS<br>120.2 | FORT WORTH CENTER<br>123.925 269.475 | TEXARKANA TOWER ★<br>123.875 (CTAF) 0 235.625 | GND CON<br>119.225 |
|---------------|--------------------------------------|-----------------------------------------------|--------------------|

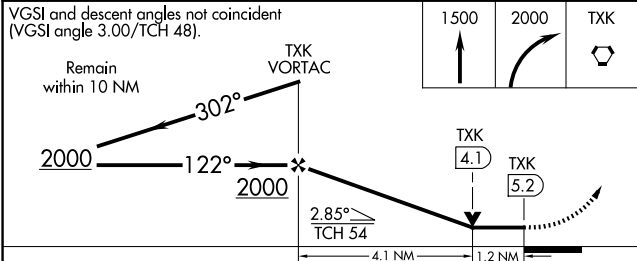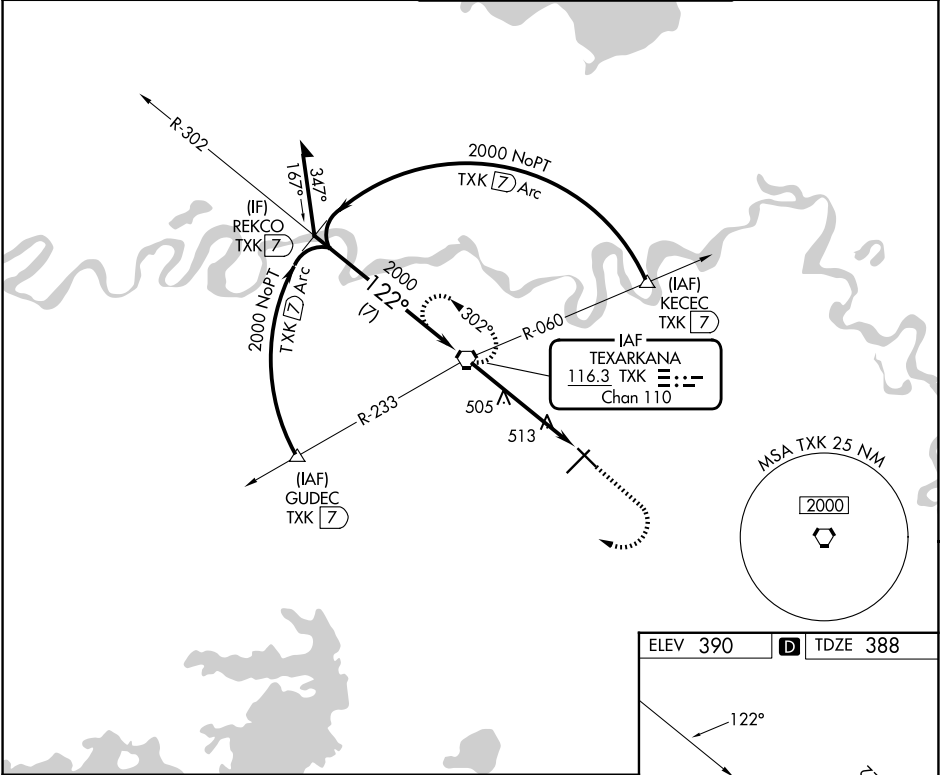

ELEV 390 TDZE 388

122°

13

TWR

22

5200 X 100

0.3% UP

6602 X 150

0.7% UP

MIRL Rwy 13-31

MIRL Rwy 4-22

FAF to MAP 5.2 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 5:12 | 3:28 | 2:36 | 2:05 | 1:44 |

| CATEGORY | A                 | B                 | C                      | D                      |
|----------|-------------------|-------------------|------------------------|------------------------|
| S-13     | 780-1 392 (400-1) |                   | 780-1 392 (400-1 3/8)  | 780-1 392 (400-1 1/4)  |
| CIRCLING | 820-1 430 (500-1) | 900-1 510 (600-1) | 1000-1 610 (700-1 3/4) | 1080-2 690 (700-2 1/4) |

SC-1, 25 DEC 2025 to 22 JAN 2026

SC-1, 25 DEC 2025 to 22 JAN 2026