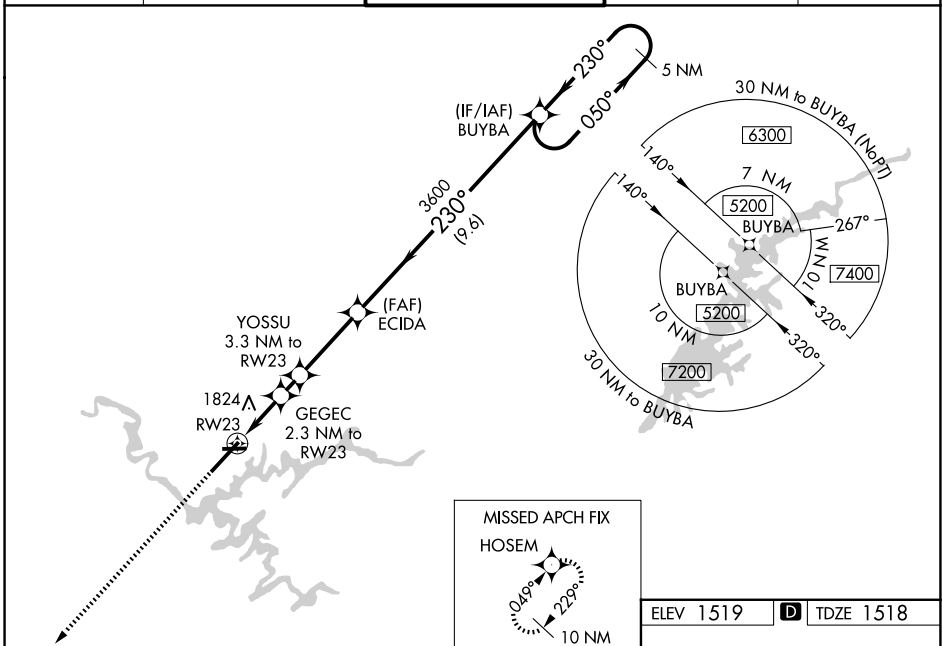


RNAV (GPS) RWY 23
TRI-CITIES (TRI)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C (9°F) or above 34°C (93°F). Circling NA NW of Rwy 9-23. For inoperative ALS, increase LNAV Cats C and D visibility to 1% SM. Circling Rwy 9 NA at night.

MISSED APPROACH:
Climb to 6400 direct
HOSEM and hold,
continue climb-in-hold
to 6400.


UNICOM
122.95

6400	HOSEM
------	-------


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55).

BUYBA 5 NM
Holding Pattern

*LNAV only.

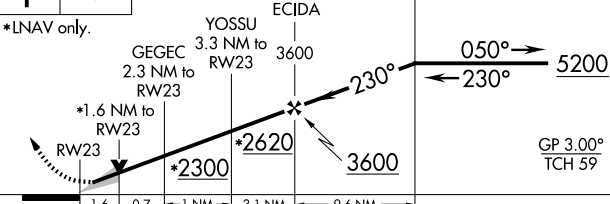

CATEGORY		A	B	C	D
LPV	DA		1718/18	200 (200-½)	
LNAP/ VNAV	DA		2160-1¼	642 (700-1¾)	
LNAP	MDA	2080/24	562 (600-½)	2080-1¼	562 (600-1¼)
CIRCLING		2120-1 601 (200-1)	2180-1 661 (700-1)	2300-2¼ 781 (800-2¼)	2500-3 981 (1000-3)



REIL Rwy 5 and 27
HIRL Rwy 5-23
MIRL Rwy 9-27
TDZL/RCLS Rwy 23