

VORTAC TUL 114.4 Chan 91	APP CRS 262°	Rwy Ldg TDZE 652 Apt Elev 678
--	------------------------	---

VOR Y or TACAN Y RWY 26
TULSA INTL (TUL)


ASR

Circling NA for Cat E south of Rwy 8-26. VOR Minimums: For inop ALS, increase Cat A/B visibility to 1 SM and Cat E to 1½ SM.
HUKDO Minimums: For inop ALS, increase Cat A/B visibility to 1 SM and Cat E to 1½ SM.

MALSR

MISSED APPROACH: Climbing left turn to 2600 on heading 220° and on TUL VORTAC R-238 to KEVIL INT/TUL 25.4 DME and hold.

D-ATIS 124.9 377.2	TULSA APP CON 124.0 338.3	TULSA TOWER 121.2 310.8 (08/26, 18L/36R) 118.7 257.8 (18R/36L)	GND CON 121.9 348.6
------------------------------	-------------------------------------	--	-------------------------------

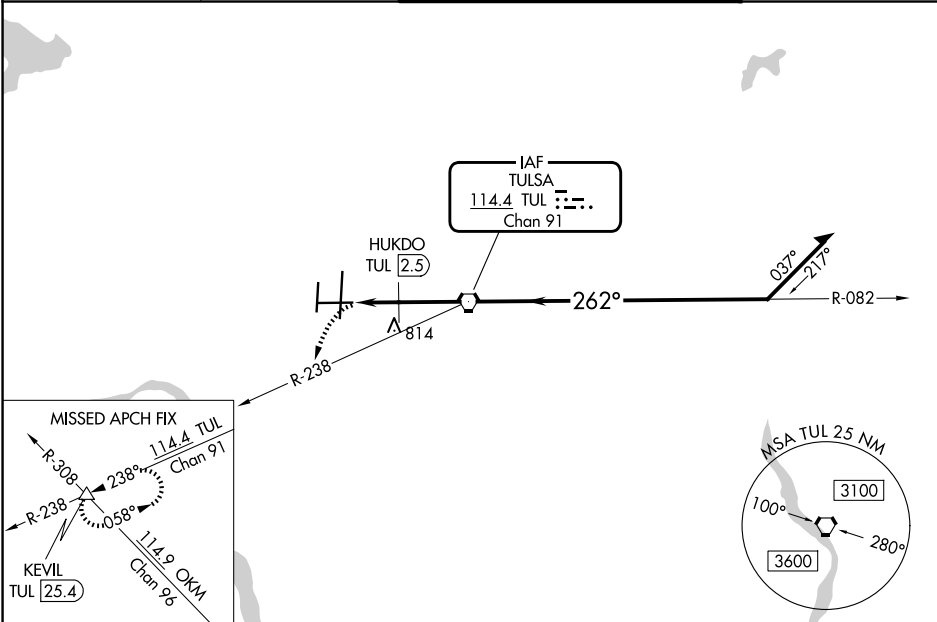

ELEV **678** **D** TDZE **652**

TDZ/CL Rwy 36R
HIRL Rwys 8-26, 18L-36R and 18R-36L
REIL Rwys 8, 18R and 36L

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

2600

hdg

220°

TUL

R-238

KEVIL

△

TUL

VORTAC

HUKDO

TUL 2.5

≤ 2.96°

TCH 57

1200

2000

TUL 4.2

1.7 NM

2.5 NM

082°

262°

2400

Remain within 15 NM

CATEGORY	A	B	C	D	E
S-26	1200-¾ 548 (600-¾)		1200-1¼ 548 (600-1¼)		
CIRCLING	1200-1 522 (600-1)		1520-2½ 842 (900-2½)	1520-2¾ 842 (900-2¾)	1520-3 842 (900-3)
HUKDO FIX MINIMUMS					
S-26	1080-¾ 428 (500-¾)				
CIRCLING	1120-1 442 (500-1)	1160-1 482 (500-1)	1520-2½ 842 (900-2½)	1520-2¾ 842 (900-2¾)	1520-3 842 (900-3)

VOR Y or TACAN Y RWY 26

SC-1, 25 DEC 2025 to 22 JAN 2026

SC-1, 25 DEC 2025 to 22 JAN 2026