

VOR/DME ALW
116.4
Chan **111**

APP CRS
203°

Rwy Ldg
TDZE **1194**
Apt Elev **1194**

VOR RWY 20
WALLA WALLA RGNL (ALW)

ADF required.


NA

For inop ALS, increase JOSBO fix minimums S-20 Cats C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 2300 then climbing right turn to 5100 direct TRINA LOM/ALW 6.7 DME and hold, continue climb-in-hold to 5100.

ASOS 135.875	SPOKANE APP CON★ 133.15 379.15	WALLA WALLA TOWER★ 118.5 (CTAF) 289.4	GND CON 121.6 289.4	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

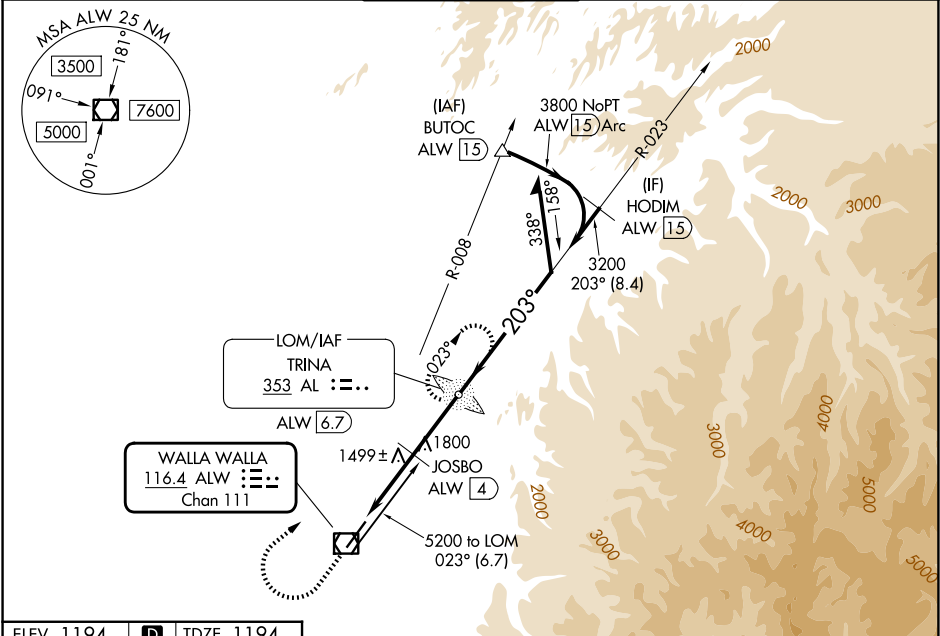

ELEV 1194

D

TDZE 1194

203°

2300

5100

AL

JOSBO ALW 4

ALW 2.6

ALW VOR/DME

TRINA AL LOM ALW 6.7

3200

2140*

1.6 NM

1.4 NM

2.7 NM

3.26°

TCH 50

023°

203°

4900

3200

*2260 when using Pendleton altimeter setting.

Remain within 10 NM

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).

CATEGORY	A	B	C	D
S-20	2140/40 946 (1000-¾)		2140-2 946 (1000-2)	
CIRCLING	2140-1¼ 946 (1000-1¼)		2140-2¾ 946 (1000-2¾)	2300-3 1106 (1200-3)
JOSBO FIX MINIMUMS (DME REQUIRED)				
S-20	1760/24 566 (600-½)		1760-1¼ 566 (600-1¼)	
CIRCLING	1760-1 566 (600-1)	1820-1 626 (700-1)	2120-2¾ 926 (1000-2¾)	2300-3 1106 (1200-3)

REIL Rwy 2 1
HIRL Rwy 2-20 1