

LOC I-BAF	APP CRS	Rwy Ldg
111.9	204°	8919
		TDZE
		270
		Apt Elev
		270


ILS or LOC RWY 20
WESTFIELD-BARNES RGNL (BAF)

⚠ Circling Rwy 15 NA at night. DME from BAF VORTAC. DME use requires simultaneous reception of I-BAF and BAF DME. For inop ALS, increase S-ILS 20 Cat E visibility to RVR 4000; increase S-LOC 20 Cat E visibility to 3 SM; increase PETGE fix minimums S-LOC 20 Cat E visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 direct CTR VOR/DME and hold, continue climb-in-hold to 4000.

ATIS	BRADLEY APP CON	WESTFIELD TOWER ★	GND CON
127.1 263.15	125.35 281.5	125.075 (CTAF) 0 251.1	121.7 289.4

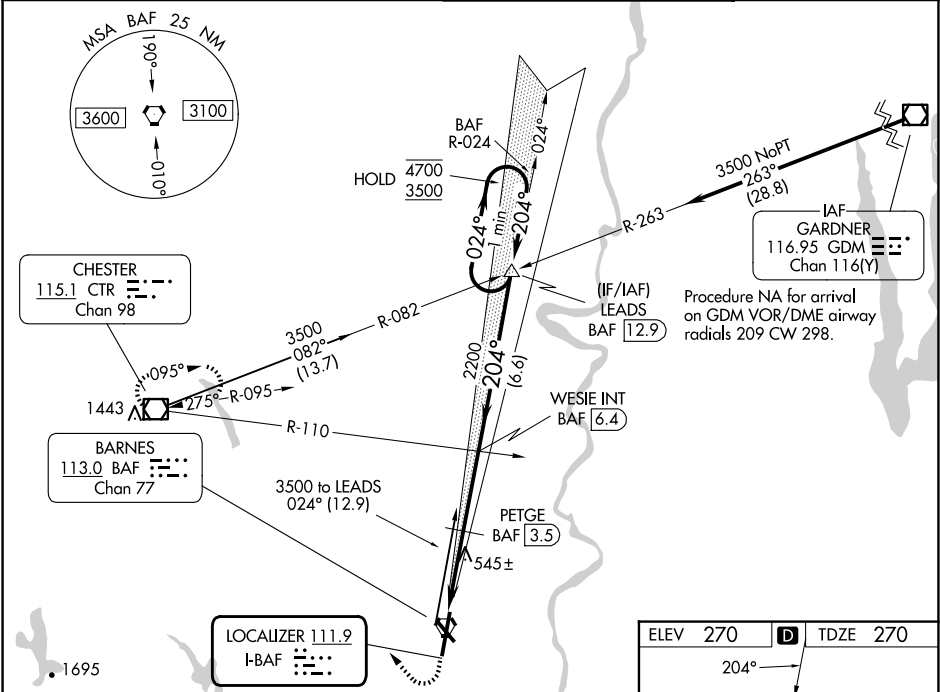

1300 4000 CTR *LOC only. WESIE INT BAF 6.4 LEADS BAF 12.9 One Minute Holding Pattern


BAF 0.5 BAF 2 PETGE BAF 3.5

2200 204° 2200 024° 4700 3500

GS 3.00° TCH 50

1.5 NM 1.5 NM 2.9 NM 6.6 NM

CATEGORY	A	B	C	D	E
S-ILS 20	520/24 250 (300-½)				
S-LOC 20	1260/40 990 (1000-¾)	1260/55 990 (1000-1)	1260-2½ 990 (1000-2½)		
CIRCLING	1260-1¼ 990 (1000-1¼)	1260-1½ 990 (1000-1½)	1260-3 990 (1000-3)	1660-3 1390 (1400-3)	
PETGE FIX MINIMUMS (DME REQUIRED)					
S-LOC 20	800/24	530 (600-½)	800/55 530 (600-1)		
CIRCLING	1160-1¼	890 (900-1¼)	1160-2¾ 890 (900-2¾)	1660-3 1390 (1400-3)	

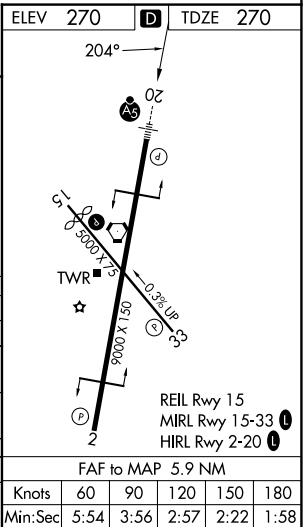

NE-1, 25 DEC 2025 to 22 JAN 2026

NE-1, 25 DEC 2025 to 22 JAN 2026