

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>86405</b><br><b>W20A</b> | APP CRS<br><b>204°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>8919</b><br><b>270</b><br><b>270</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 20

WESTFIELD-BARNES RGNL (B.A.F.)

⚠

Baro-VNAV NA when using Bradley Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Bradley Intl altimeter setting and increase LPV DA to 561; LNAV/VNAV DA to 996 and increase all Cats visibility to 2¼; all MDA 60 feet and LNAV Cats B, C, D and E visibility to 1¼. For inoperative MALSR, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 2½, LNAV Cat E visibility to 1½. Night landing: Rwy 1.5 NA.

✴


-20°C

MALSR

MISSED APPROACH:

Climb to 1700 then climbing right turn to 4000 direct CTR VOR/DME and hold.

|                             |                                        |                                                    |                               |
|-----------------------------|----------------------------------------|----------------------------------------------------|-------------------------------|
| ATIS<br><b>127.1 263.15</b> | BRADLEY APP CON<br><b>125.35 281.5</b> | WESTFIELD TOWER ★<br><b>125.075 (CTAF) 0 251.1</b> | GND CON<br><b>121.7 289.4</b> |
|-----------------------------|----------------------------------------|----------------------------------------------------|-------------------------------|

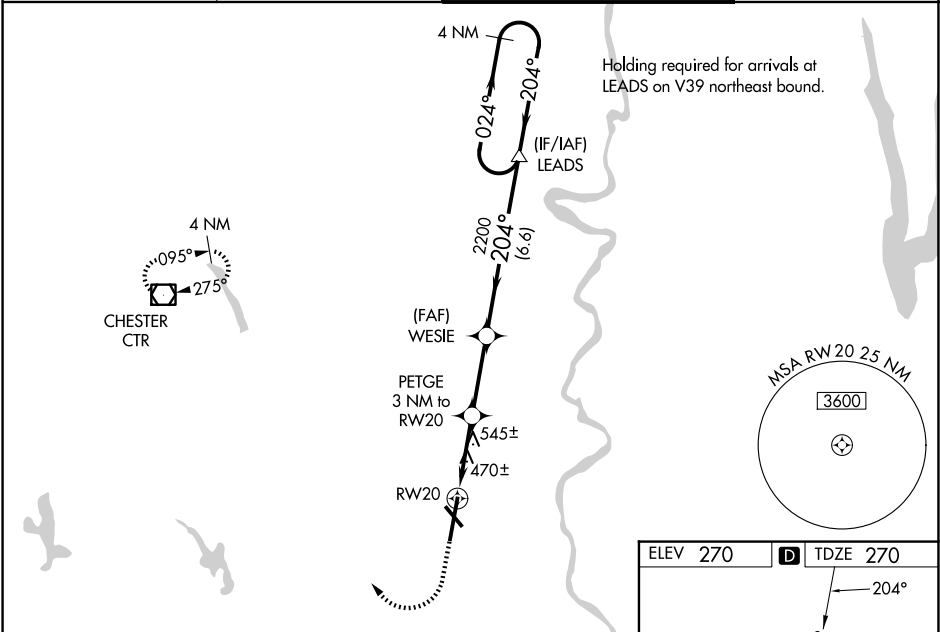

|               |      |         |                          |                         |   |             |               |
|---------------|------|---------|--------------------------|-------------------------|---|-------------|---------------|
| 1700          | 4000 | CTR     |                          |                         |   |             |               |
|               |      |         |                          |                         |   |             |               |
| * LNAV only.  |      |         | PETGE<br>3 NM to<br>RW20 |                         |   |             |               |
|               |      |         |                          |                         |   |             |               |
| CATEGORY      |      |         | A                        | B                       | C | D           | E             |
| LPV           | DA   | 520/24  |                          | 250 (300-½)             |   |             |               |
| LNAV/<br>VNAV | DA   | 955-1⅞  |                          | 685 (700-1⅞)            |   |             |               |
| LNAV          | MDA  | 800/24  | 530 (600-½)              | 800/55                  |   | 530 (600-1) |               |
| CIRCLING      |      | 1160-1¼ | 890 (900-1¼)             | 1160-2¾<br>890 (900-2¾) |   | 1660-3      | 1390 (1400-3) |

