


|                                                                                                    |                          |                                              |                        |                                                                                                          |        |
|----------------------------------------------------------------------------------------------------|--------------------------|----------------------------------------------|------------------------|----------------------------------------------------------------------------------------------------------|--------|
| TACAN SHP<br>Chan 45                                                                               | APCH CRS<br>149°         | Rwy Idg 13,100<br>TDZE 998<br>Arpt Elev 1019 | [USAF]                 | SHEPPARD AFB/WICHITA FALLS MUNI                                                                          | (KSPS) |
| * When ALS inop, increase CAT CDE vis to 1¼ miles.<br>** Circling not authorized W of Rwy 15R-33L. |                          |                                              | MALSR<br>A5            | MISSED APPROACH: Climb and maintain 3100, intercept SHP TACAN R-155 to SHP R-155/9 DME (JIVIT) and hold. |        |
| ATIS★<br>132.05 269.9                                                                              | APP CON<br>118.2 269.025 | TOWER★<br>119.75 279.525 (CTAF)              | GND CON<br>125.5 289.4 | CLNC DEL<br>121.2 282.225                                                                                | ASR    |

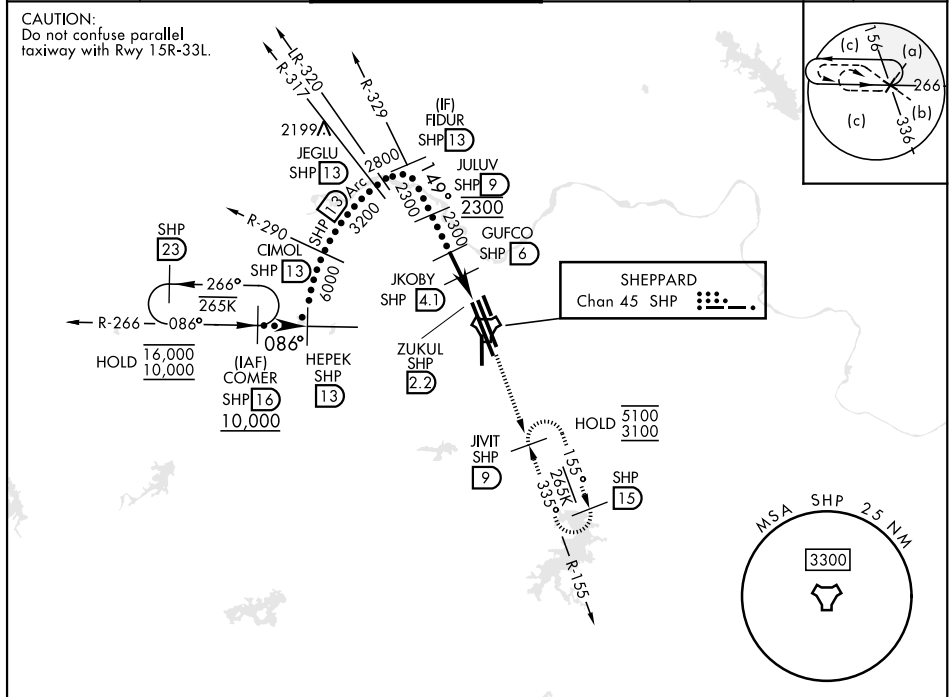

|                                        |                  |             |                |             |
|----------------------------------------|------------------|-------------|----------------|-------------|
| EMERG SAFE ALT 100 NM 4600             |                  |             | ELEV 1019      | TDZE 998    |
| VGSI and descent angle not coincident. |                  |             | 3100 SHP R-155 | JIVIT SHP 9 |
|                                        |                  |             |                |             |
| CATEGORY                               | C                | D           | E              |             |
| S-15R*                                 | 1420-¾           | 422 (500-¾) |                |             |
| CIRCLING**                             | 1480-1½ (500-1½) | 2100-3      | 1081 (1100-3)  |             |