


APP CRS	Rwy Ldg	7110
211°	TDZE	404
	Apt Elev	410

RNAV (RNP) Z RWY 21R

TRI-CITIES (PSC)

For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 54°C (130°F). GPS required. RF required. For inoperative MALSR, increase RNP 0.11 all Cnts visibility to RVR 5700 and RNP 0.30 all Cnts visibility to 1 3/8 mile.	MALSR	MISSED APPROACH: Climb to 5200 on track 211° to KARTE, right turn to DAMSE, and on track 332° to PAIDS and hold.
---	--------------	---

ATIS 125.65	SPOKANE APP CON * 128.75 377.2	TRI-CITIES TOWER * 135.3 (CTAF) 0 285.55	GND CON 121.8	UNICOM 122.95
----------------	-----------------------------------	---	------------------	------------------

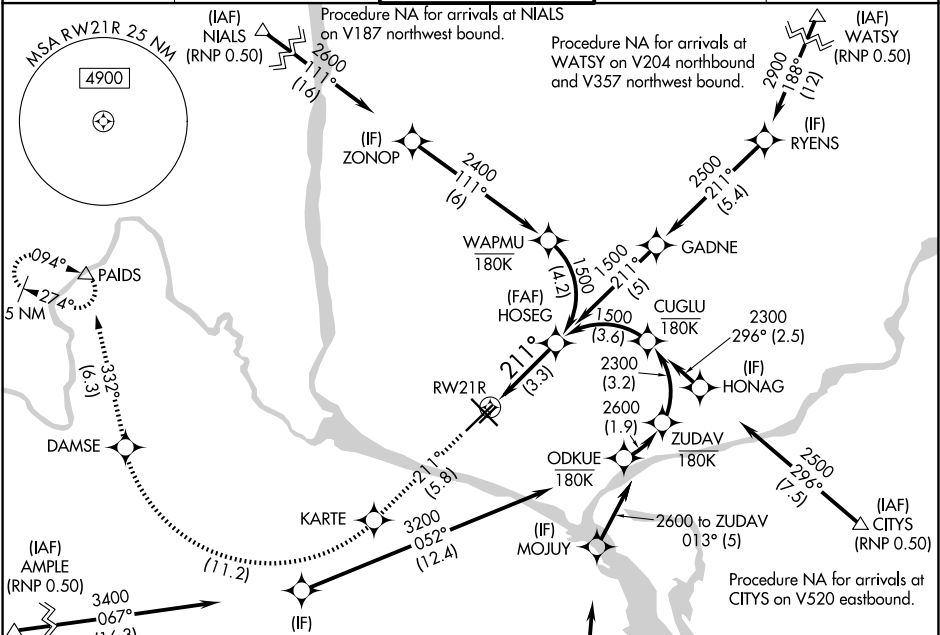


ELEV 410	TDZE 404
----------	----------

5200	KARTE	DAMSE	tr 332°	PAIDS
tr 211°				

See planview for multiple IF locations.

RW21R	211°	1500	GP 3.00° TCH 55
-------	------	------	-----------------

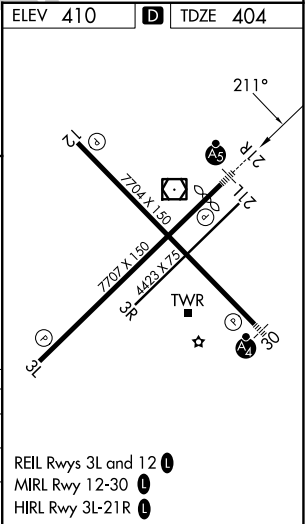

CATEGORY	A	B	C	D
RNP 0.11 DA		754/33	350 (400-5%)	
RNP 0.30 DA		832/48	428 (500-1)	

AUTHORIZATION REQUIRED

NW-1, 25 DEC 2025 to 22 JAN 2026

NW-1, 25 DEC 2025 to 22 JAN 2026