

RNAV (RNP) Y RWY 18L

APCH CRS	Rwy Idg
175°	9001
TDZE	1382
Arpt Elev	1382



AL-482 [USAF]

ALTUS AFB (KLTS)

RNP AR APCH - GPS	SALSF 	MISSED APPROACH: Climb to 4000 direct CIPNO and hold.
▼*When ALS inop, increase RVR to 45, vis to 7/8 mile. **When ALS inop, increase RVR to 55, vis to 1 mile.		



ATIS ★	FORT WORTH CENTER	APP CON	TOWER ★	GND CON	CLNC DEL
109.8 273.5	133.5 350.35	125.1 353.7	119.65 254.4	121.85 275.8	120.65 284.7


For uncompensated Baro-VNAV systems, procedure NA below -17°C (2°F) or above 54°C (130°F).

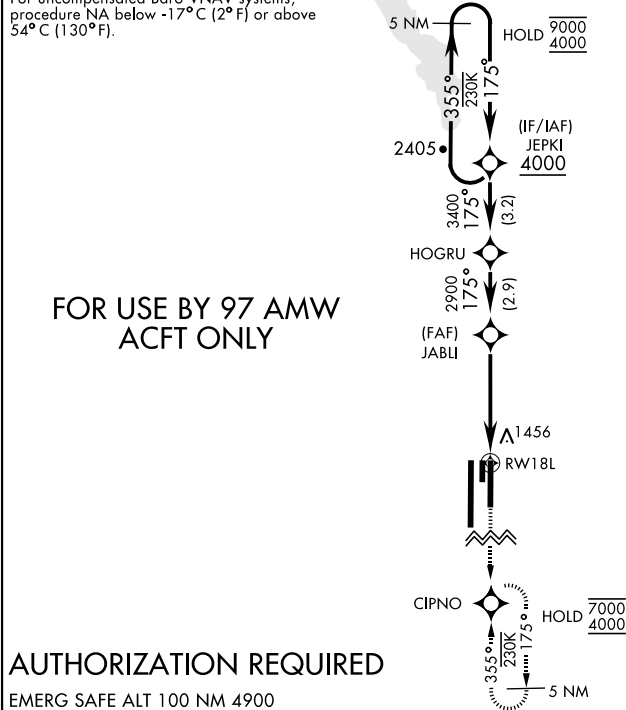

AUTHORIZATION REQUIRED

EMERG SAFE ALT 100 NM 4900

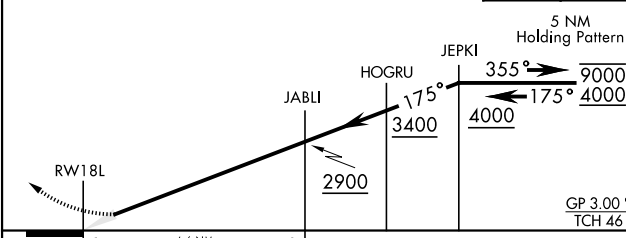				
5 NM Holding Pattern				
				
CATEGORY	A	B	C	D
RNP 0.10 DA*	1644/40	262	(300-¾)	
RNP 0.30 DA**	1729/40	347	(400-¾)	
CIRCLING	NOT AUTHORIZED			

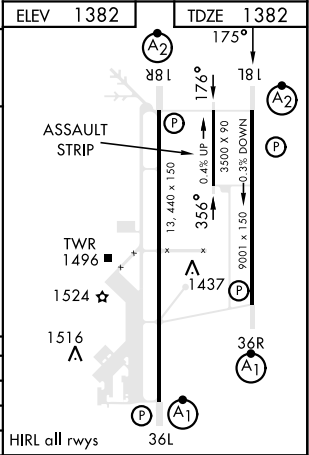

RNAV (RNP) Y RWY 18L

SC-1, 25 DEC 2025 to 22 JAN 2026

SC-1, 25 DEC 2025 to 22 JAN 2026