

LOC I-RUM <u>108.7</u>	APP CRS 126°	Rwy Ldg 5601 TDZE 593 Apt Elev 595
----------------------------------	------------------------	---

ILS or LOC RWY 13
SAN MARCOS RGNL (HYI)

ADF required.

T Circling NA for Cat E southwest of Rwy 13-31. Inop
A NA table does not apply to S-ILS 13 all Cats. For inop ALS,
increase S-LOC 13 Cat C/D/E visibility to $1\frac{1}{8}$ SM.



MALS



MISSED APPROACH: Climb to 2000 then climbing left turn to 3200 direct GARYS LOM/INT and hold.

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125
------------------------	---------------------------------------	---	---------------------------

ALTERNATE MISSED APCH FIX

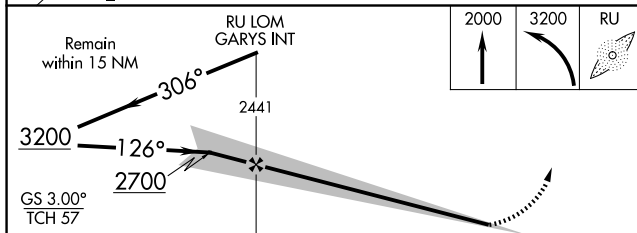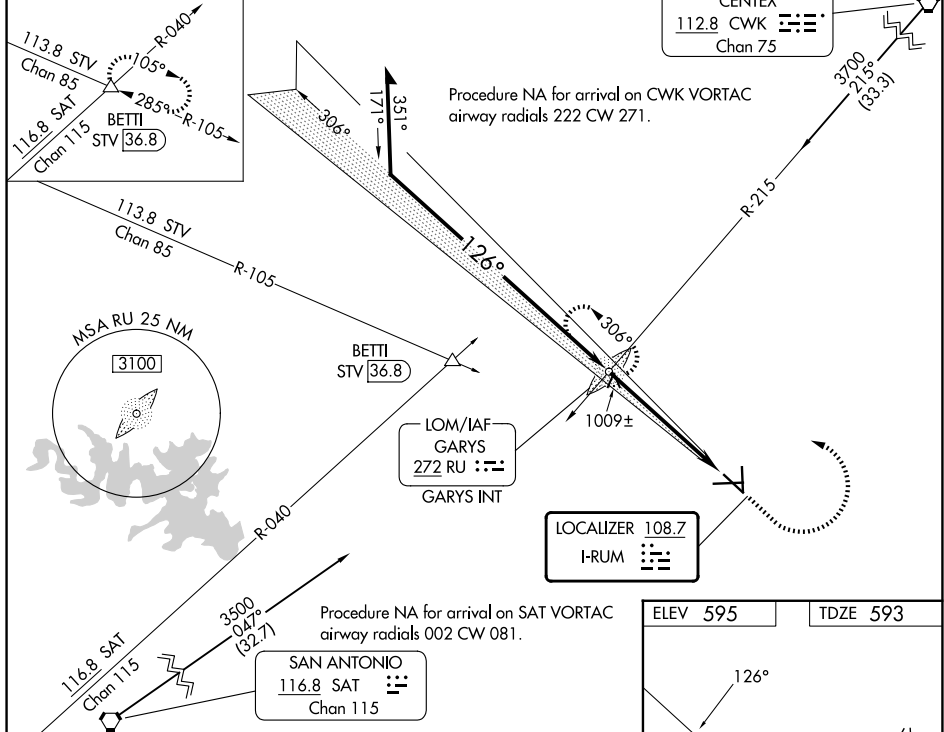

CATEGORY	A	B	C	D	E
S-ILS-13	793- ³ / ₄ 200 (200- ³ / ₄)				
S-LOC-13	1260- ³ / ₄ 667 (700- ³ / ₄)		1260-1 ³ / ₄ 667 (700-1 ³ / ₄)		
CIRCLING	1260-1 665 (700-1)	1260-1 ⁷ / ₈ 665 (700-1 ⁷ / ₈)	1320-2 ¹ / ₄ 725 (800-2 ¹ / ₄)	1340-2 ³ / ₄ 745 (800-2 ³ / ₄)	

ELEV 595 TDZE 593

126°

13

5501 X 100

6330 X 100

8

TWR

0.4% UP

521.4 X 100

92

35

17-35

MIRL Rwy 8-26, 13-31, and 17-35

FAF to MAP 5.5 NM

	Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50	