

WAAS CH 77832 W17A	APP CRS 171°	Rwy Ldg TDZE 595 Apt Elev 595
--	------------------------	---


RNAV (GPS) RWY 17

SAN MARCOS RGNL (HYI)

⚠ Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and Circling Cat C/D visibility ¼ mile; increase LNAV/VNAV all Cats and LNAV Cat C/D/E visibility ⅓ mile. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3100 direct
CILAK and hold.

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125
------------------------	---------------------------------------	---	---------------------------

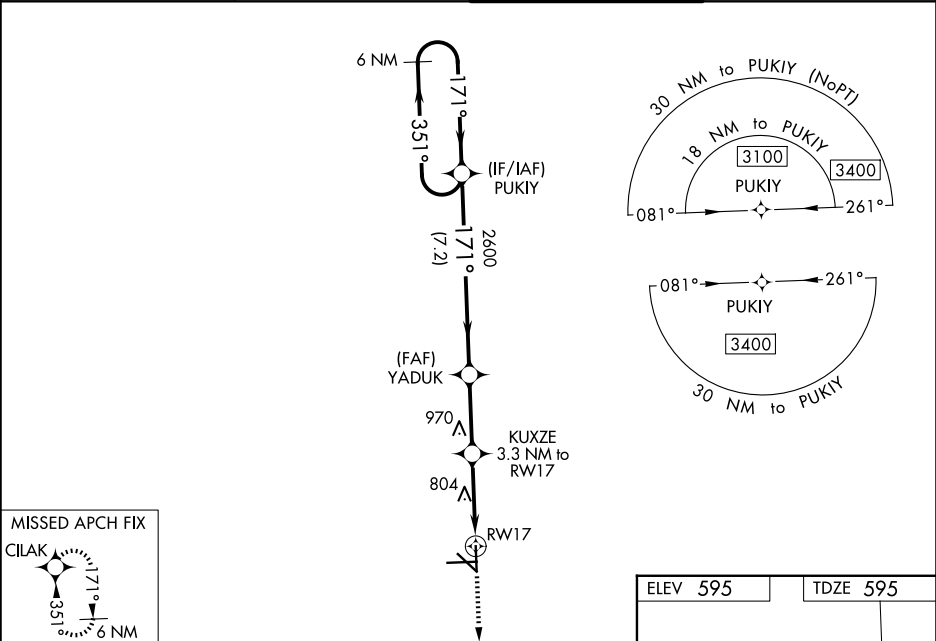

6 NM Holding Pattern

PUKIY

YADUK

KUXZE 3.3 NM to RW17

RW17

3100

GP 3.00° TCH 55

2600

171°

351°

7.2 NM

2.8 NM

2 NM

1.3 NM

*LNAV only.

*1700

*1.3 NM to RW17

CATEGORY	A	B	C	D	E
LPV DA	960-1½ 365 (400-1½)				
LNAV/VNAV DA	1052-1½ 457 (500-1½)				
LNAV MDA	1060-1	465 (500-1)	1060-1¾ 465 (500-1¾)		
CIRCLING	1080-1 485 (500-1)	1120-1 525 (600-1)	1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)

