

WAAS CH 90337 W34A	APP CRS 343°	Rwy Ldg TDZE 8203 7280 Apt Elev 7289
--	------------------------	--

RNAV (GPS) RWY 34

KEMMERER MUNI (EMM)



▼

▲

Baro-VNAV and VDP NA when using Evanston altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C (-16°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
Night landing: Rwy 4, 10, 22, 28 NA. When local altimeter setting not received, use Evanston altimeter setting: increase all DA 111 feet and visibilities 1/8 mile; increase all MDA 120 feet.

MISSED APPROACH: Climb to 12000 direct ATOXY and on track 268° direct GEGME and hold, continue climb-in-hold to 12000.

AWOS-3PT 119.675	SALT LAKE CITY CENTER 124.35 353.5	UNICOM 122.8 (CTAF) ①
----------------------------	--	---------------------------------

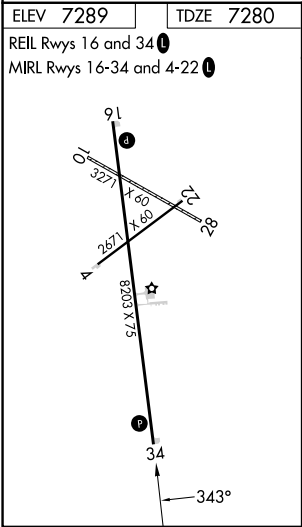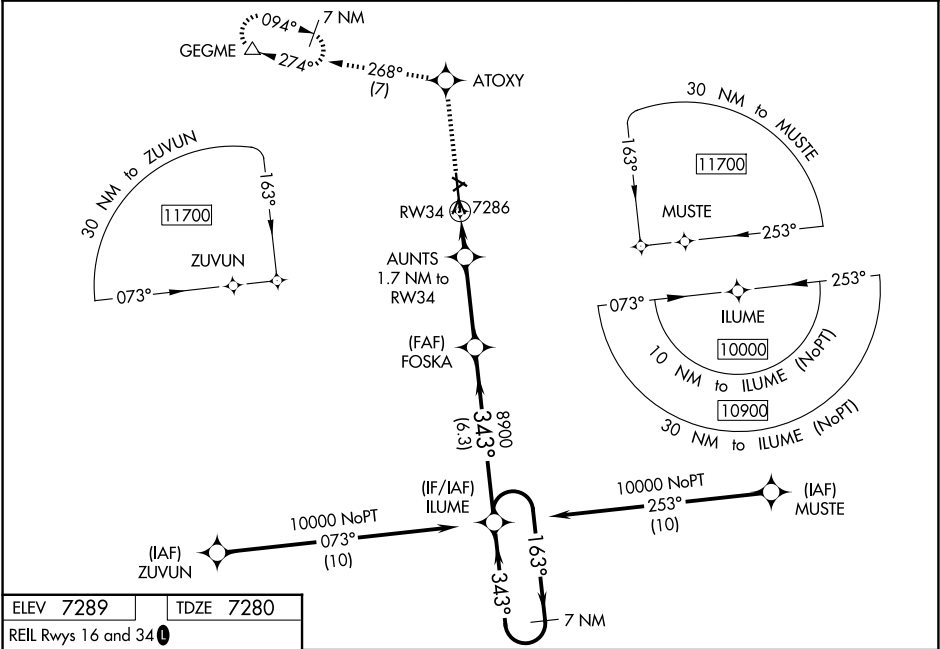

12000	ATOXY	fr 268°	GEGME	VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 61).	7 NM Holding Pattern
*LNAV only.			AUNTS 1.7 NM to RW34	FOSKA	ILUME
0.6 NM to RW34			7860	8900	10000
0.6 1.1 NM 3.3 NM 6.3 NM					GP 3.00° TCH 60
CATEGORY	A		B	C	D
LPV DA	7530-1 250 (300-1)			NA	
LNAV/VNAV DA	7530-1 250 (300-1)			NA	
LNAV MDA	7540-1 260 (300-1)			NA	
CIRCLING	7660-1 371 (400-1)		8240-1½ 951 (1000-1½)	NA	