

ILS or LOC RWY 22

LOC I-CVS <u>109.7</u>	APCH CRS 218°	Rwy Idg 10,001 TDZE 4295 Arpt Elev 4295	[USAF]	CANNON AFB (KCVS)
----------------------------------	-------------------------	--	--------	-------------------

Missed approach requires use of RNAV or ATC RADAR monitoring.

T * When ALS inop, increase RVR to 40 and vis to $\frac{3}{4}$ miles.
 ** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile,
 CAT CDE vis to $1\frac{1}{4}$ miles.

ALSF-1




MISSED APPROACH: Climb to 6000 out CVS TACAN R-220 to 6 DME (JEBES) then turn left climbing to 7000 intercept CVS R-193 to 12 DME (CLINK) and hold.


ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	CANNON TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225
---------------------	---------------------------------	------------------------------	------------------------	---------------------------

CAUTION:

1. ILS Rwy 22 Height Group 4 WCH 19 feet.

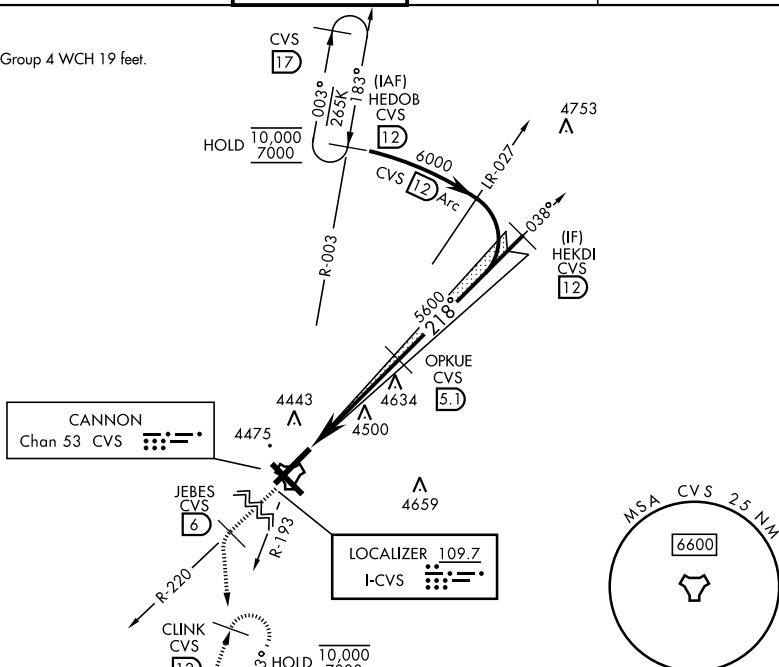

EMERG SAFE ALT 100 NM 8000

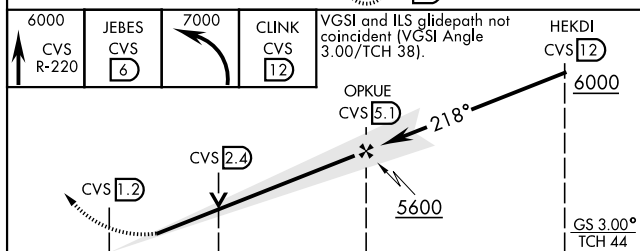

CATEGORY	A	B	C	D	E
S-LS 22 *	4495/24		200	(200-½)	
S-LOC 22 **	4720/24 425 (500-½)		4720/40 425 (500-¾)		
CIRCLING	4840-1 545 (600-1)	4860-1½ 565 (600-1½)	5000-2¼ 705 (800-2¼)	5020-2½ 725 (800-2½)	

ELEV 4295

TDZE 4295

4433
☆
TWR 4437

4437
■

218°

22

3

10.001 x 150

8.184 x 150

0.3° UP

HIRL all runways

FAF to MAP 4 NM

	Knots	60	90	120	150	180
Min:Sec	4:00	2:40	2:00	1:36	1:20	

CLOV|S, NEW MEX|CO

34°23'N-103°19'W

CANNON AFB (KCVS)

Amdt 4 13AUG20

ILS or LOC RWY 22

SW-1, 25 DEC 2025 to 22 JAN 2026

SW-1, 25 DEC 2025 to 22 JAN 2026