

LOC/DME I-BPT	APP CRS	Rwy Idg	6508
110.15	120°	TDZE	15
Chan 38(Y)		Apt Elev	15

ILS or LOC RWY 12

JACK BROOKS RGNL (BPT)

DME or RADAR required.

- ▼ Helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to S-ILS 12.

▲ When local altimeter setting not received use Orange County altimeter setting: increase S-ILS 12 DA to 297 feet; increase all MDAs 40 feet. COUGS fix minimums: increase S-LOC 12 visibility Cat C/D/E to RVR 5000. For inop ALS, increase S-LOC visibility Cat A to RVR 5500 and Cat C/D/E to 2½ SM. COUGS fix minimums: increase S-LOC visibility Cat A/B to RVR 5500 and Cat E to 1½ SM. For inop ALS when using Orange County altimeter setting, increase S-ILS 12 all Cats visibility to RVR 4500, S-LOC 12 visibility Cat A to RVR 5500 and Cat C/D/E to 2½ SM. COUGS fix minimums: increase S-LOC 12 visibility Cat A/B to RVR 5500 and Cat C/D/E to 1½ SM. VDP NA when using Orange County altimeter setting.


*RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Orange County altimeter setting.

MALSR




MISSED APPROACH:
Climb to 500 then
climbing right turn to
3000 direct SBI
VOR/DME and hold.

ATIS	HOUSTON APP CON	BEAUMONT TOWER*	GND CON	CLNC DEL	UNICOM
126.3	121.3 377.1	119.5 (CTAF) 0	124.85	118.3	122.95

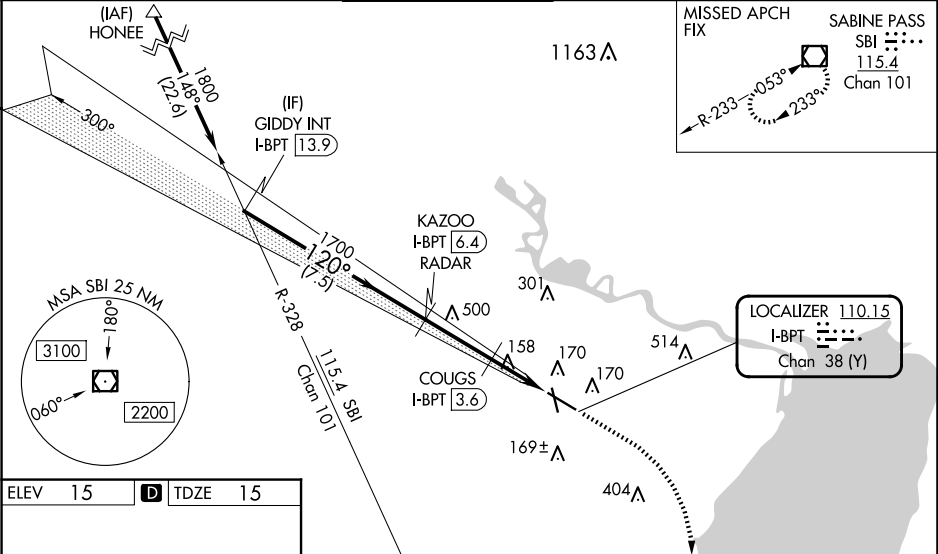

ELEV 15	D	TDZE 15
---------	---	---------



REIL Rwy 16, 30 and 34						1
HIRL Rwy 12-30, 16-34						1
FAF to MAP 5.1 NM						
Knots	60	90	120	150	180	
Min:Sec	5:06	3:24	2:33	2:02	1:42	

Use I-BPT DME when on the localizer course.				
500 3000 SBI				
GIDY INT I-BPT 13.9 KAZOO I-BPT 6.4 COUGS I-BPT 3.6				
1800 1700 820				
GS 3.00° TCH 52				
7.5 NM 2.8 NM 1.1 NM 1.2 NM				
CATEGORY	A	B	C	D E
S-ILS 12*	265/40 250 (300-¾)			
S-LOC 12	820/40	805 (900-¾)	820-1½	805 (900-1½)
COUGS FIX MINIMUMS (DME REQUIRED)				
S-LOC 12	460/40	445 (500-¾)	460/45	445 (500-¾)