

WAAS CH 69611 W17A	APP CRS 168°	Rwy Ldg TDZE 1135 Apt Elev 1166
--	------------------------	---

RNAV (GPS) RWY 17

EDWARD F KNAPP STATE (MPV)

RNP APCH - GPS.

RADAR required for procedure entry at VUYUD.

▼

▲

☁-19°C

Rwy 17 helicopter visibility reduction below 1 SM NA. Inop table does not apply to LPV all Cats and LNAV Cats A and B. Baro-VNAV NA. When local altimeter setting not received, procedure NA. Straight-in Rwy 17 NA at night, Circling Rwy 5, 17, 35 NA at night. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 3⁄8 SM.


MALSR

AS


●

MISSED APPROACH:
Climb to 1720 then climb to 5200 direct MPV VOR/DME and hold, continue climb-in-hold to 5200.

ASOS 132.675	BOSTON CENTER 135.7 282.2	UNICOM 122.8 (CTAF) 0
------------------------	-------------------------------------	---------------------------------

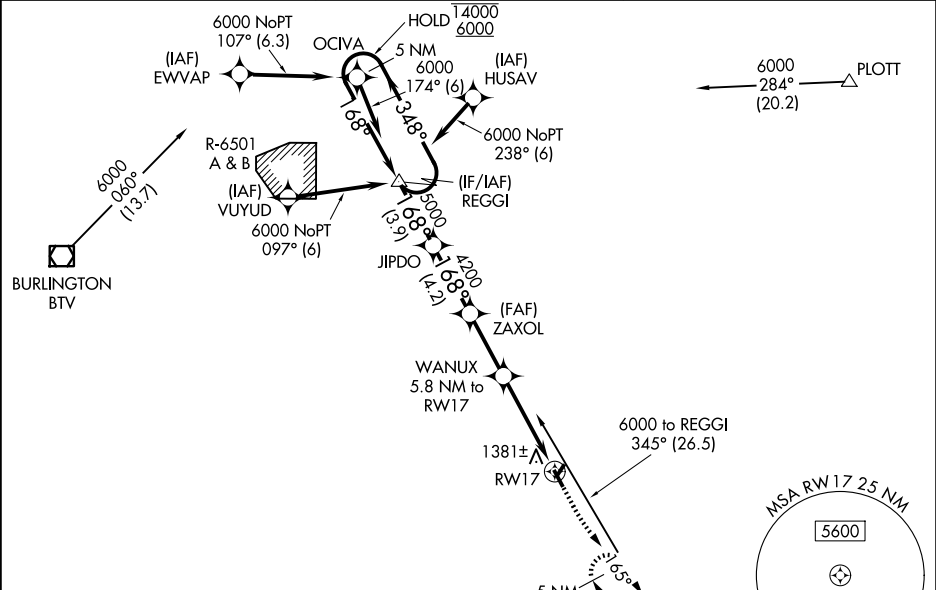

ELEV 1166	TDZE 1135
-----------	-----------

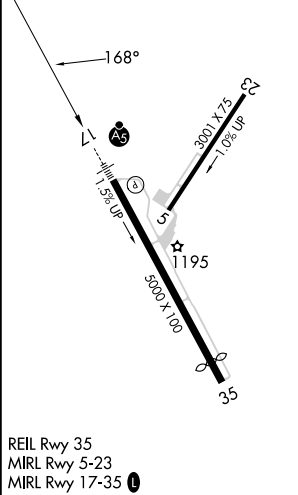

Procedure NA for arrival on MPV VOR/DME airway radials 315 CW 037.

5 NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 46).		1720	5200	MPV
REGGI		JIPDO		↑	↑	☐
14000 6000		348° 168°				
GP 3.00° TCH 55		5000				
		3.9 NM				
CATEGORY		A	B	C	D	
LPV DA		1509-1		374 (400-1)		
LNAV/VNAV DA		1624-1		489 (500-1)		
LNAV MDA		1680-1	545 (600-1)	1680-1 1⁄8	545 (600-1 1⁄8)	
CIRCLING		1980-1 1⁄4	814 (900-1 1⁄4)	2700-3 1534 (1600-3)	2920-3 1754 (1800-3)	