


APP CRS	Rwy Ldg	9000
175°	TDZE	492
	Apt Elev	542

RNAV (RNP) Z RWY 18L

AUSTIN-BERGSTROM INTL (AUS)

RADAR required. RNP AR APCH-GPS.	ALSIF-2	MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct HOOKK and hold.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.		

D-ATIS	AUSTIN APP CON	AUSTIN TOWER	GND CON
124.4	127.225 317.65 (E) 120.875 270.25 (S) 119.0 370.85 (W)	121.0 281.5	121.9 348.6

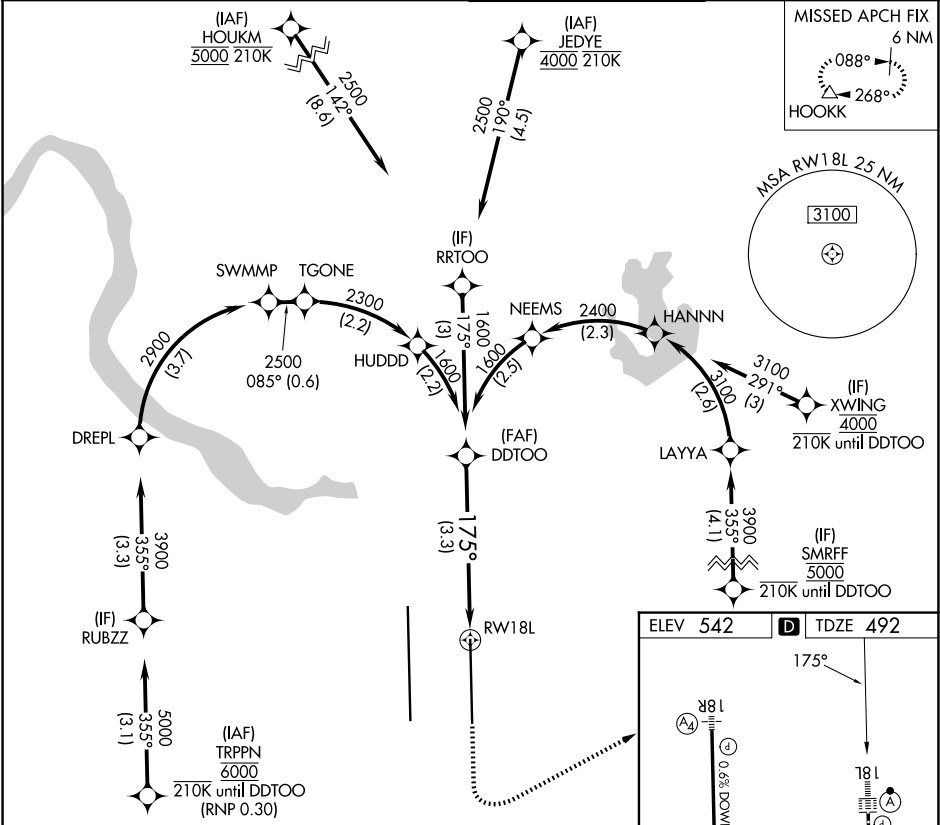

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 74).			
1600	1600	1000	3000
GP 3.00°	175°	HOOKK	
TCH 61	See planview for multiple IF locations.	RW18L	
CATEGORY	A	B	C
RNP 0.24 DA	825/26	333 (300-1/2)	
RNP 0.30 DA	885/35	393 (400-5/8)	
AUTHORIZATION REQUIRED			

