

ILS RWY 17L (CAT II & III)
ORLANDO INTL (MCO)

MISSED APPROACH: Climb to 500 then climbing left turn to 3000 on heading 100° and ORL VORTAC R-140 to PRESK INT/ORL 16.2 DME and hold, continue climb-in-hold to 3000.

ORLANDO TOWER
253.5 (17L/35R, 17R/35L)
253.5 (18L/36R, 18R/36L)

Diagram illustrating the flight paths of various aircraft (BOSCH, KAKEY, HERVI, FONIK, SEEDO, COCAS) and the BANYA aircraft, showing altitudes and headings relative to the USS Zumwalt (DDG 1000).

Key Data Points:

- BOSCH (IAF):** 6000, 210K, 185° (3.3), 5000
- KAKEY (IAF):** 5000, 17, 185° (3.2), 4000
- HERVI (IF):** 13.8, 185° (3.2), 3000
- FONIK (I-ARK):** 10.7, 185° (1.6), 2500
- SEEDO (I-ARK):** 9.1, 185° (3.2), 1500
- COCAS (I-ARK):** 5.9, 185° (3.2), 1500
- BANYA (IAF):** 7000, 210K

Other Labels:

- Orlando Exec
- 238

MSA ORL 25 NM


3000

A map showing a 25 NM radius circle centered on a point. A depth contour of 3000 meters is indicated. A pentagon symbol is located within the circle.

SE-3, 25 DEC 2025 to 22 JAN 2026

[illegible]

HIRL all Rwy's
REIL Rwy 36L
TDZ/CL Rwy's 17L/R, 18R, 35L/R
and 36R

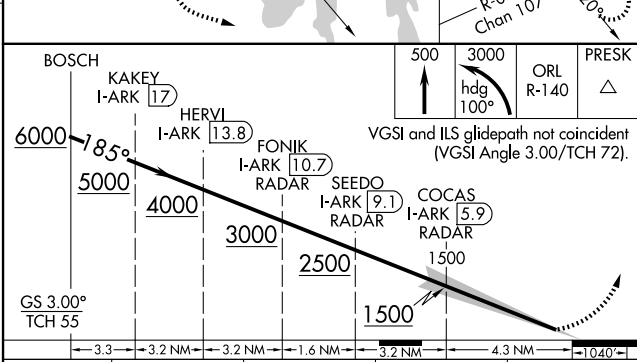

CATEGORY	A	B	C	D
S-ILS 17L	CAT II	RA 101/12	100 DA 190	
S-ILS 17L		CAT III	RVR 06	

CATEGORY II & III ILS - SPECIAL AIRCREW
& AIRCRAFT CERTIFICATION REQUIRED