

WAAS

CH **70411**

W18B

APP CRS

181°

Rwy Idg

7019

TDZE

128

Apt Elev

131

RNAV (GPS) RWY 18R

GREENVILLE MID-DELTA (GLH)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct KEVNE and hold.

ASOS 125.525	MEMPHIS CENTER 135.875 269.35	GREENVILLE TOWER ★ 119.0 (CTAF) 0 256.9	GND CON 121.8 256.9	UNICOM 122.95
------------------------	---	--	-------------------------------	-------------------------

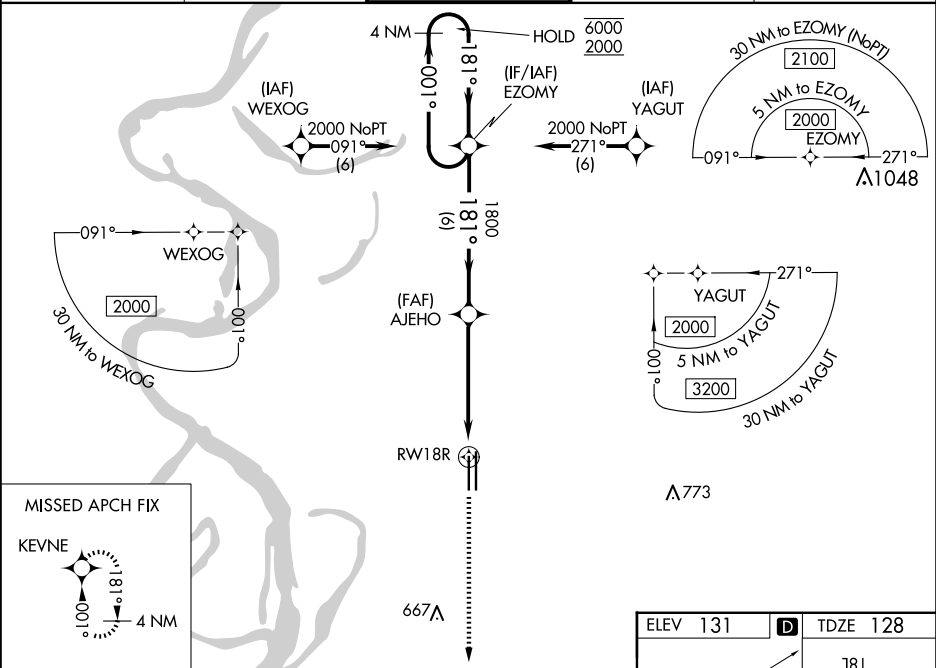

4 NM Holding Pattern

2000

KEVNE

GP 3.00°

TCH 50

CATEGORY	A	B	C	D
LPV DA	328-1		200 (200-1)	
LNAV/VNAV DA	523-1½		395 (400-1½)	
LNAV MDA	580-1	452 (500-1)	580-1¾	452 (500-1¾)
CIRCLING	600-1	469 (500-1)	600-1½	800-2

6000

2000

181°

1800

1.3 NM to RWY 18R

RWY 18R

6 NM

3.8 NM

1.3

ELEV 131

D

TDZE 128

181°

18R

1800

150

7019 X 150

8001 X 150

298

36L

36R

REIL Rwy 36R

MIRL Rwy 18R-36L

HIRL Rwy 18L-36R