


WAAS CH 50408 W17A	APP CRS 175°	Rwy Ldg TDZE Apt Elev	7201 1004 1009
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17
PONCA CITY RGNL (PNC)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 2700 direct ZULOT and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS increase LPV visibility all Cats to ½ SM.		

ASOS 134.075	KANSAS CITY CENTER 127.8 319.1	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

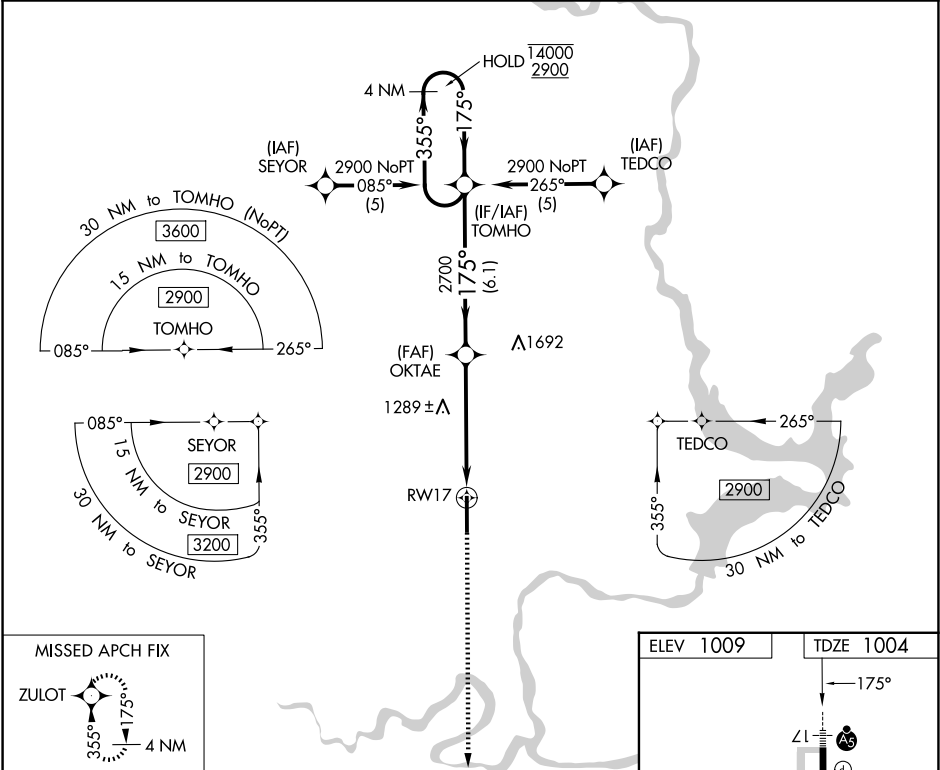

4 NM

Holding Pattern

TOMHO

OKTAE

2700

1.6 NM to RW17

RW17

14000

2900

←355°

175°→

GP 3.00°

TCH 48

2700

175°

6.1 NM

3.6 NM

1.6 NM

2700

2700


2700

↑

ZULOT

✦

CATEGORY	A	B	C	D
LPV DA	1279-½		275 (300-½)	
LNAV/VNAV DA	1330-½		326 (400-½)	
LNAV MDA	1540-½	536 (600-½)	1540-1	536 (600-1)
CIRCLING	1540-1	1580-1	1800-2¼	1880-2¾
	531 (600-1)	571 (600-1)	791 (800-2¼)	871 (900-2¾)

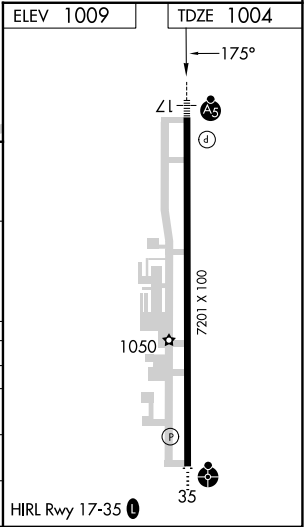

SC-1, 25 DEC 2025 to 22 JAN 2026

SC-1, 25 DEC 2025 to 22 JAN 2026