

LOC/DME I-SGF 109.9 Chan 36	APP CRS 019°	Rwy Ldg 7003 TDZE 1265 Apt Elev 1268
---	------------------------	---

ILS or LOC RWY 2
SPRINGFIELD-BRANSON NTL (SGF)

T A DME or RADAR required. For inop MALS R, increase S-ILS 2 Cat E visibility to RVR 4000, and S-LOC 2 Cat E visibility to 1½ mile. #RVR 1800 authorized with use of FD or AP or HUD to DA.	MALS R 	MISSED APPROACH: Climb to 3000 direct SGF VORTAC and hold (TACAN aircraft continue on SGF VORTAC R-024 to PLADD/SGF 18.4 DME and hold northeast, right turn, 204° inbound).
--	---	--



ATIS 135.125	SPRINGFIELD APP CON 124.95 290.5	SPRINGFIELD TOWER 119.9 257.8	GND CON 121.9 251.15	CLNC DEL 123.675
-----------------	-------------------------------------	----------------------------------	-------------------------	---------------------

ALTERNATE MISSED APCH FIX

DOGWOOD
DGD 
109.4
Chan 31



DME or RADAR REQUIRED

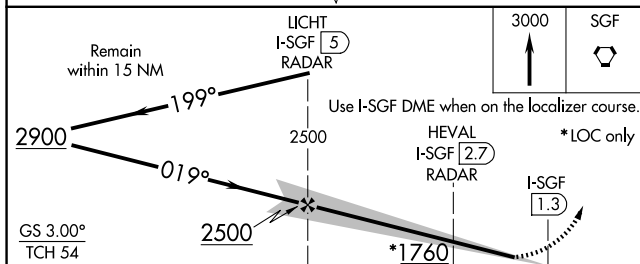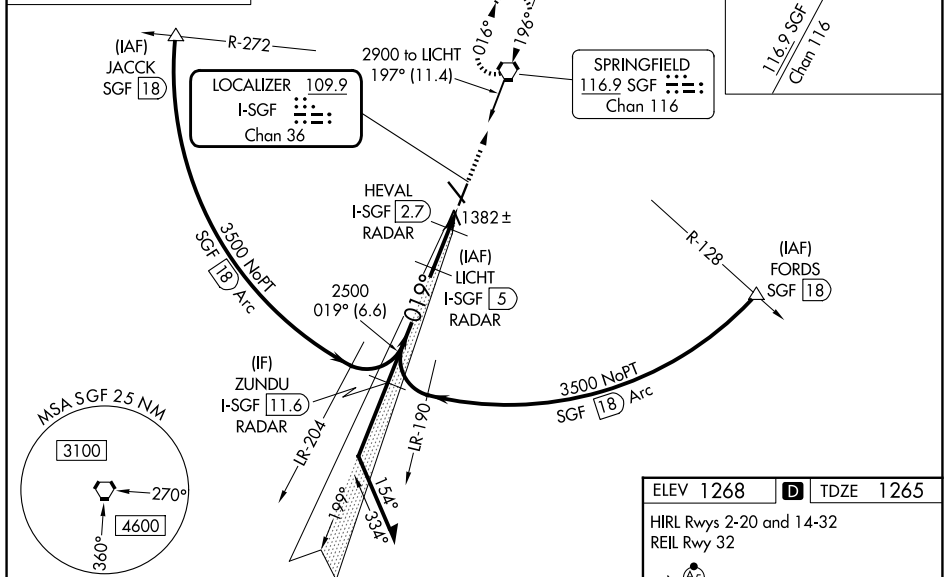

				2.3 NM	1.4 NM	
CATEGORY	A	B	C	D	E	
S-ILS 2 #	1465/24 200 (200-1/2)					
S-LOC 2	1700/24	435 (500-1/2)	1700/40 435 (500-3/4)			
CIRCLING	1760-1 492 (500-1)	1820-1 552 (600-1)	1820-1 1/2 552 (600-1 1/2)	1920-2 652 (700-2)	2080-3 812 (900-3)	

