

WAAS CH 86214 W02A	APP CRS 019°	Rwy Ldg TDZE Apt Elev	7003 1265 1268
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 2
SPRINGFIELD-BRANSON NTL (SGF)


V DME/DME RNP -0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 45°C (113°F).
Baro-VNAV and VDF NA when using Monett altimeter setting.
For inoperative MALSR, increase LNAV Cat A and B visibility to RVR 5000.
When local altimeter setting not received, use Monett altimeter setting and increase all DAs 90 feet and all MDAs 100 feet, increase LPV visibility all Cats to RVR 5000, LNAV/VNAV visibility all Cats to 1½ miles, LNAV visibility Cat C to RVR 5000 and Cat D to RVR 6000, and increase visibility Circling Cat C to 1¼ miles, and Cat D to 2 miles.
For inoperative MALSR, when using Monett altimeter setting, increase LPV visibility all Cats to 1½, LNAV Cat A and B visibility to RVR 5000.

MALSR



MISSED APPROACH: Climb to 3000 direct INOYU and hold.

ATIS 135.125	SPRINGFIELD APP CON 124.95 290.5	SPRINGFIELD TOWER 119.9 257.8	GND CON 121.9 251.15	CLNC DEL 123.675
-----------------	-------------------------------------	----------------------------------	-------------------------	---------------------

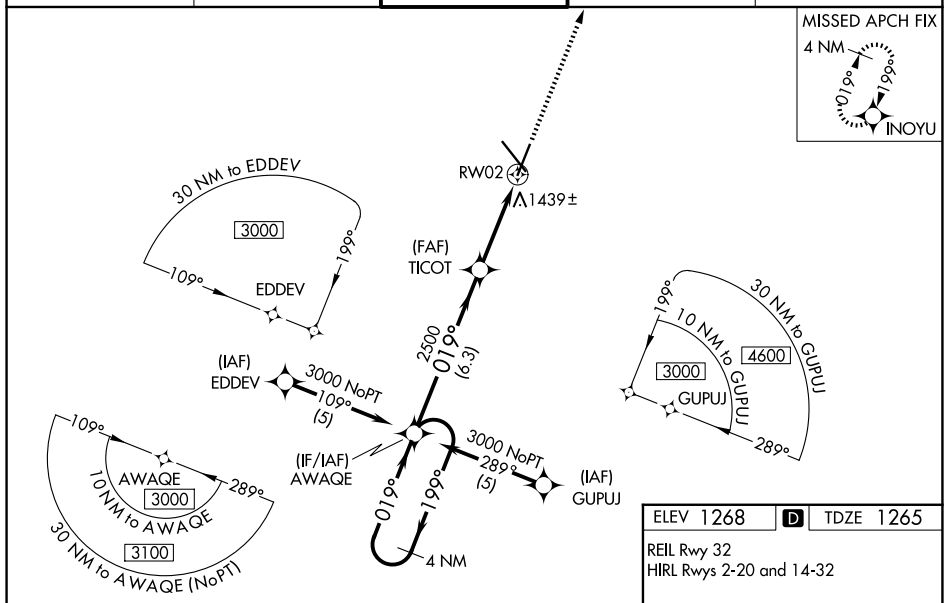

4 NM Holding Pattern

AWAKE

3000

199°

019°

GP 3.00° TCH 54

TICOT

2500

019°

6.3 NM

2.4 NM

1.3 NM

*1.3 NM to RW02

RW02

*LNAV only

CATEGORY	A	B	C	D
LPV DA	1590/40 325 (400-¾)			
LNAV/VNAV DA	1754/60 489 (500-1¼)			
LNAV MDA	1720/40 455 (500-¾)			1720/50 455 (500-1)
CIRCLING	1760-1 492 (500-1)	1820-1 552 (600-1)	1820-1½ 552 (600-1½)	1920-2 652 (700-2)

