

LOC I-HUF 109.7	APP CRS 049°	Rwy Idg TDZE Apt Elev	9020 573 589
---------------------------	------------------------	-----------------------------	---


ILS or LOC RWY 5
TERRE HAUTE RGNL (HUF')

ADF or DME required.

V VDP NA when using Paris altimeter setting. When local altimeter setting not received, use Paris altimeter setting and increase all DA 61 feet and all MDA 80 feet, increase S-LOC 5 Cats C/D visibility to RVR 4500. For inop ALS, increase S-LOC 5 Cat C/D visibility to RVR 5500, when using Paris altimeter setting increase S-ILS 5 all Cats visibilities to RVR 4500 and S-LOC Rwy 5 all Cats visibility ½ SM. **RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Paris altimeter setting.

MALSR MISSED APPROACH: Climb to 2300 direct TTH VORTAC and hold.

ATIS 127.5 269.375	HULMAN APP CON 125.45 339.8	HULMAN TOWER 134.725 322.475	GND CON 121.6 348.6
------------------------------	---------------------------------------	--	-------------------------------

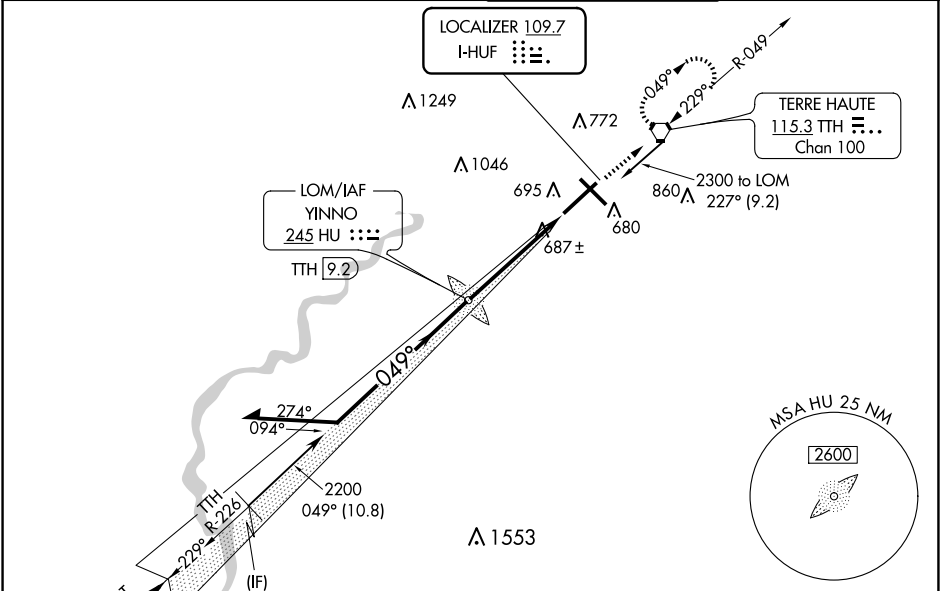

Remain within 10 NM			
YINNO LOM TTH 9.2			
2300			
GS 3.00° TCH 40			
2200			
2125			
* TTH 5.5			
* LOC only.			
3.7 NM			
1 NM			
CATEGORY	A	B	C
S-ILS 5 **	773/24		
S-LOC 5	940/24	367 (400-½)	940/35 367 (400-⅝)
CIRCLING	1040-1 451 (500-1)	1040-1 451 (500-1)	1220-1¾ 631 (700-1¾) 1220-2 631 (700-2)

ELEV 589	D	TDZE 573
REIL Rwys 14, 23 and 32		
HIRL Rwys 5-23 and 14-32		
FAF to MAP 4.7 NM		
Knots	60	90 120 150 180
Min:Sec	4:42	3:08 2:21 1:53 1:34

EC-2, 25 DEC 2025 to 22 JAN 2026

EC-2, 25 DEC 2025 to 22 JAN 2026