


LOC I- IA	APP CRS	Rwy Ldg
110.1	280°	9129
	TDZE	588
	Apt Elev	592


ILS Y or LOC Y RWY 28
NIAGARA FALLS INTL (IAG)

ADF required.		MALSR 	MISSED APPROACH: Climb to 1500 then climbing right turn to 3200 direct KATHI LOM and hold, continue climb-in-hold to 3200.
Rwy 28 helicopter visibility reduction below RVR 4000 NA. Circling Rwy 6 NA at night. Circling NA for Cat E southeast of Rwy 6-24. Inop table does not apply to S-ILS 28 all Cates. For inop ALS, increase S-LOC 28 visibility Cates A/B RVR 5500, Cates C/D/E 1 3/4 SM.			

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
----------------------------	---------------------------------------	--	-------------------------------	-------------------------

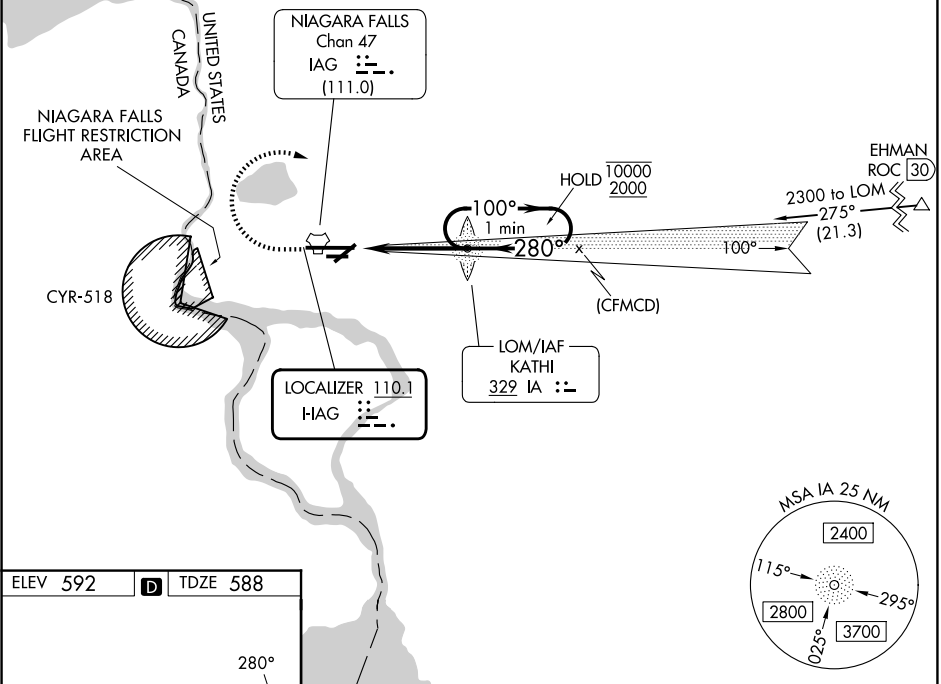

ELEV 592	D	TDZE 588
----------	----------	----------



- REIL Rwy 6 and 24
- TDZL/RCLS Rwy 28
- HIRL Rwy 10-28
- MIRL Rwy 6-24

FAF to MAP 4.1 NM					
Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

1500	3200	IA					
CATEGORY	A	B	C	D	E		
S-ILS 28	838/40 250 (300-¾)						
S-LOC 28	1080/40	492 (500-¾)	1080/50 492 (500-1)				
CIRCLING	1100-1	508 (600-1)	1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)	1280-2½ 688 (700-2½)		

ILS Y or LOC Y RWY 28

NE-2, 25 DEC 2025 to 22 JAN 2026

NE-2, 25 DEC 2025 to 22 JAN 2026