



LOC I- AG	APP CRS	Rwy Ldg	9129
110.1	280°	TDZE	588
		Apt Elev	592

ILS Z or LOC Z RWY 28

NIAGARA FALLS INTL (IAG)

ADF required. DME required.		MALSR	MISSED APPROACH: Climb to 1500 then climbing right turn to 3200 on heading 150° and KATHI LOM BRG-100 to DIONE/IAG 12 DME and hold.
Circling Rwy 6 NA at night. Rwy 28 helicopter visibility reduction below RVR 4000 NA. Circling NA for Cat E southeast of Rwy 6-24. Inop table does not apply to S-ILS 28 all Cats. For inop ALS, increase S-LOC 28 visibility Cats A/B RVR 5500, Cats C/D/E 1¾ SM.		A5	

ATIS	BUFFALO APP CON	NIAGARA TOWER★	GND CON	UNICOM
120.8 269.4	126.5 317.6	118.5 (CTAF) 0 349.0	125.3 275.8	122.95

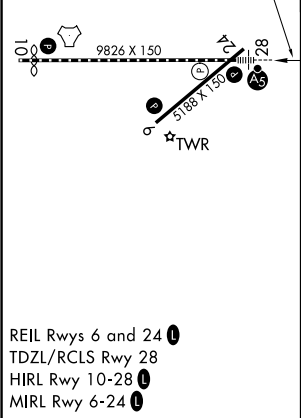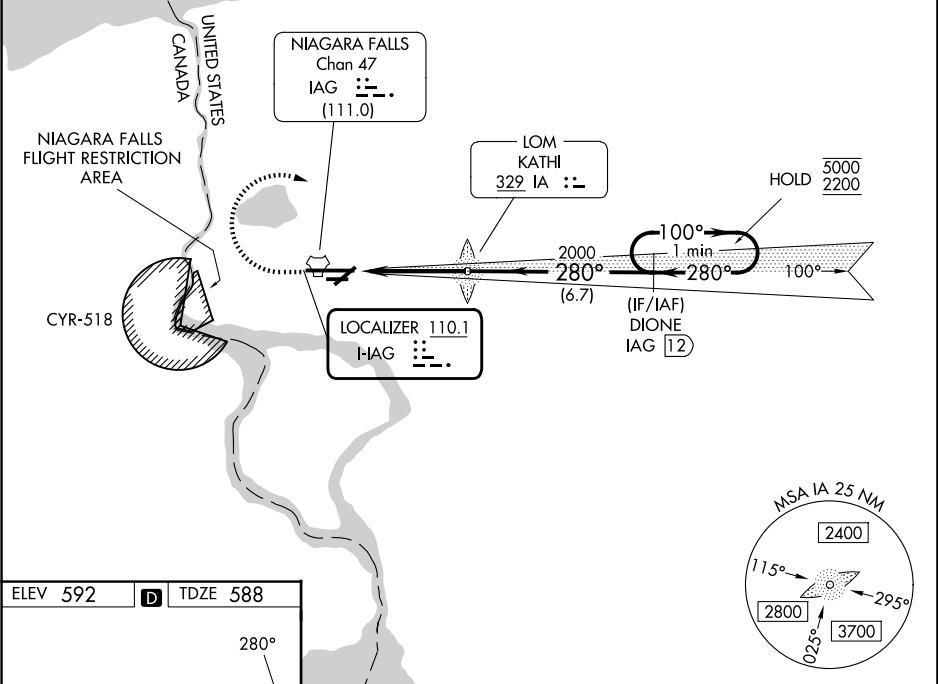

1500	3200	IA 100°	DIONE IAG 12			One Minute Holding Pattern		
↑	hdg 150°							
IA LOM		1747	280°	100°	5000	280°	2200	
IAG 1.3			2000					GS 2.50° TCH 67
4.1 NM		6.7 NM						
CATEGORY	A	B	C	D	E			
S-ILS 28	838/40		250 (300-¾)					
S-LOC 28	1080/40	492 (500-¾)		1080/50	492 (500-1)			
CIRCLING	1100-1	508 (600-1)		1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)	1280-2½ 688 (700-2½)		