


LOM IA	APP CRS	Rwy Ldg	9129
329	280°	TDZE	588
		Apt Elev	592

NDB RWY 28
NIAGARA FALLS INTL (IAG)

⚠ Circling Rwy 6 NA at night. ⚠ Rwy 28 helicopter visibility reduction below RVR 4000 NA. Circling NA for Cat E southeast of Rwy 6-24. For inop ALS, increase visibility Cats A/B RVR 5500, Cat C/D/E 1¾ SM.	MALSR 	MISSED APPROACH: Climb to 1600 on heading 294° then climbing right turn to 3200 direct KATHI LOM and hold, continue climb-in-hold to 3200.
---	-----------	--

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
---------------------	--------------------------------	---	------------------------	------------------

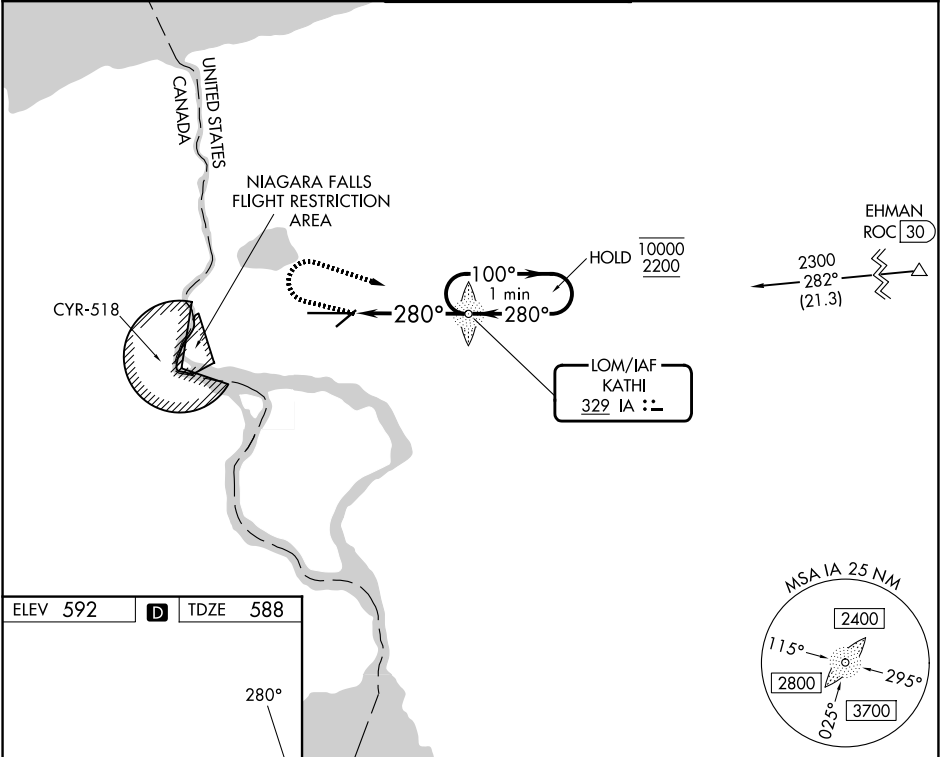

ELEV 592	D	TDZE 588
FAF to MAP 4.1 NM		
Knots	60	90 120 150 180
Min:Sec	4:06	2:44 2:03 1:38 1:22

1600	3200	IA	IA LOM KATHI			One Minute Holding Pattern	
hdg 294°						100° → 10000	← 280° 2200
CATEGORY			A	B	C	D	E
S-28	1200/40	612 (700-¾)	1200-1 ¾ 612 (700-1 ¾)				
CIRCLING	1200-1	608 (700-1)	1280-2 688 (700-2)	1280-2 ¼ 688 (700-2 ¼)	1280-2 ½ 688 (700-2 ½)		