

WAAS CH 45532 W24A	APP CRS 240°	Rwy Ldg TDZE 592 Apt Elev 592
--	------------------------	---

RNAV (GPS) Z RWY 24

NIAGARA FALLS INTL (IAG)

RNP APCH - GPS.


▼

⚠


Rwy 24 helicopter visibility reduction below ¾ SM NA.
Circling Rwy 6 NA at night.

MISSED APPROACH: Climb to 1400, then climbing left turn to 3600 direct ZUPUV and hold.
*Missed approach requires minimum climb of 265 feet per NM to 2120; if unable to meet climb gradient, see RNAV (GPS) Y Rwy 24.

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
----------------------------	---------------------------------------	---	-------------------------------	-------------------------

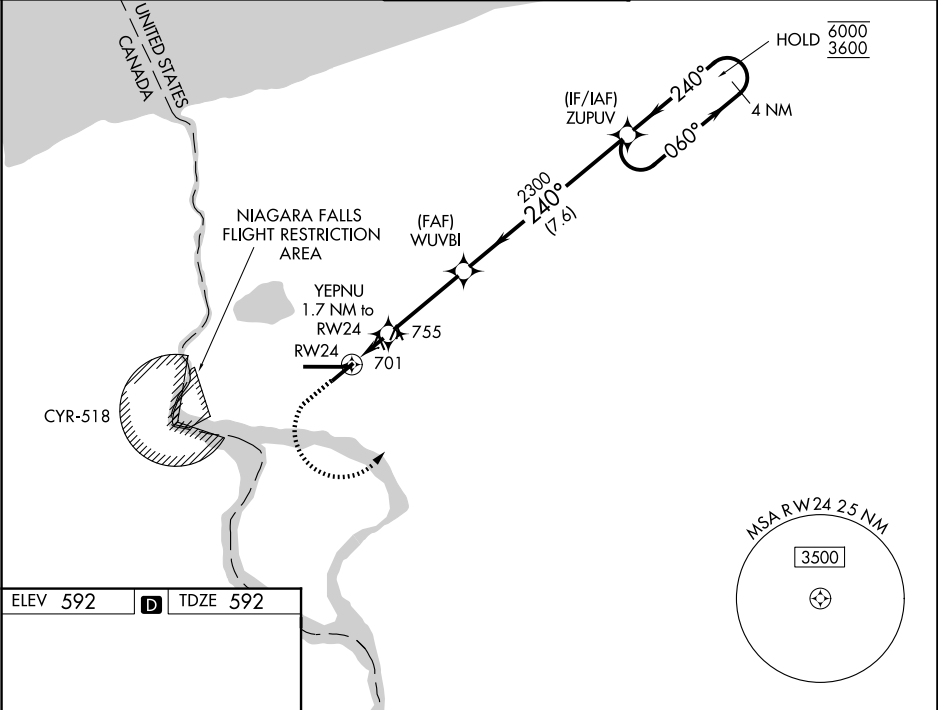

ELEV 592	D	TDZE 592
-----------------	----------	-----------------



- REIL Rwy 6 and 24
- TDZL/RCLS Rwy 28
- RCLS Rwy 10
- HIRL Rwy 10-28
- MIRL Rwy 6-24

	1400	3600	ZUPUV		
				YEPNU 1.7 NM to RWY 24	WUVBI
				1.1 NM to RWY 24	
				3.00° TCH 48	
				2300	
				240°	060°
				240°	240°
				6000	3600
				4 NM	Holding Pattern
				1.1 NM	0.6
				3.5 NM	7.6 NM
CATEGORY	A	B	C	D	
LP MDA *	1000-1	408 (500-1)	1000-1½	408 (500-1½)	
LNAV MDA *	1020-1	428 (500-1)	1020-1¼	428 (500-1¼)	
CIRCLING	1100-1	508 (600-1)	1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)	