

WAAS CH 40014 W04A	APP CRS 042°	Rwy Idg 7734 TDZE 542 Apt Elev 544
--	------------------------	---

RNAV (GPS) RWY 4
TYLER POUNDS RGNL (TYR)


MALSR

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 ½ SM. LNAV all Cats visibility to 1 SM.



MISSED APPROACH: Climb to 1100 then climbing right turn to 2500 direct OTTIF and hold.

ATIS 126.25	LONGVIEW APP CON ★ 128.75 379.15	POUNDS TOWER ★ 120.1 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

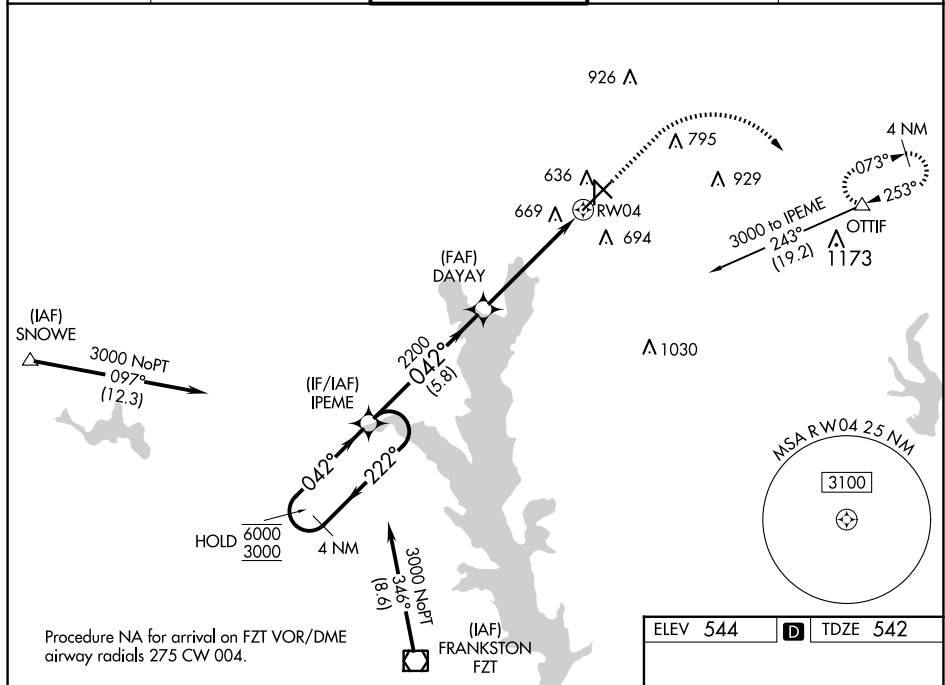

4 NM
Holding Pattern

IPEME

6000 ← 222°
3000 → 042°

GP 3.00°
TCH 54

DAYAY
2200

*1 NM to RWY04

RWY04


5.8 NM

4 NM

1 NM

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		742-½	200 (200-½)	
LNAV/ VNAV	DA	943-¾	401 (400-¾)	
LNAV MDA		920-½ 378 (400-½)	920-⅝ 378 (400-⅝)	
C CIRCLING	980-1 436 (500-1)	1020-1 476 (500-1)	1160-1¾ 616 (700-1¾)	1280-2¼ 736 (800-2¼)

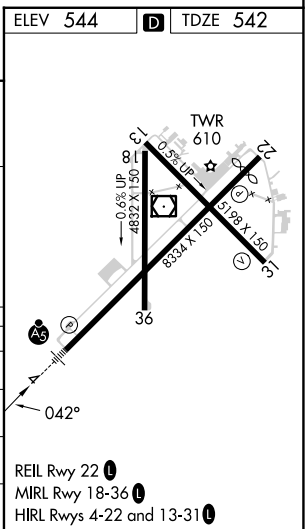

SC-2, 25 DEC 2025 to 22 JAN 2026