


VOR/DME TYR	APP CRS	Rwy Idg	7734
114.2	032°	TDZE	542
Chan 89		Apt Elev	544

VOR RWY 4
TYLER POUNDS RGNL (TYR)

DME required. For inop ALS, increase Cat C/D visibility to 1 1/8 SM.		MALSR AS	MISSED APPROACH: Climb to 1000 then climbing left turn to 2200 on TYR VOR/DME R-311 to INDOO INT/TYR 4.9 DME and hold.	
ATIS 126.25	LONGVIEW APP CON ★ 128.75 379.15	POUNDS TOWER ★ 120.1 (CTAF) 257.8		GND CON 121.9
				UNICOM 122.95

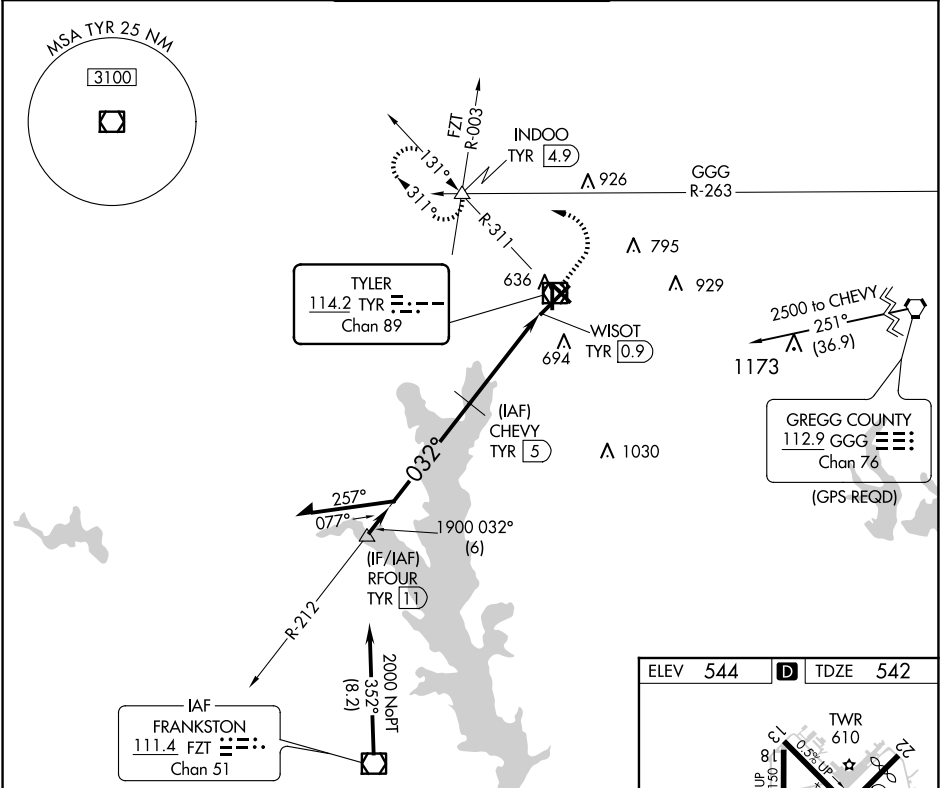

Remain within 10 NM		CHEVY TYR 5	2100	1000	2200	IND00
2000		032°	1900	TYR 2	WISOT TYR 0.9	
3.00° TCH 55		3 NM	1.1 NM			
CATEGORY	A	B	C	D		
S-4	940-1/2	398 (400-1/2)	940-3/4	398 (400-3/4)		
CIRCLING	980-1 436 (500-1)	1020-1 476 (500-1)	1160-1 3/4 616 (700-1 3/4)	1280-2 1/4 736 (800-2 1/4)		

