


WAAS CH 61039 W18A	APP CRS 176°	Rwy Ldg TDZE Apt Elev	9180 7 11
--	------------------------	-----------------------------	--------------------------------------

RNAV (GPS) RWY 18

ST PETE-CLEARWATER INTL (PIE)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 2600 direct RONXI and hold.
Circling to Rwy 22 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C and D visibility to RVR 5500.		A5	

ATIS 134.5	TAMPA APP CON 125.3 316.05	ST PETERSBURG-CLEARWATER TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 120.6 350.2	UNICOM 122.95
----------------------	--------------------------------------	---	-------------------------------	--------------------------------	-------------------------

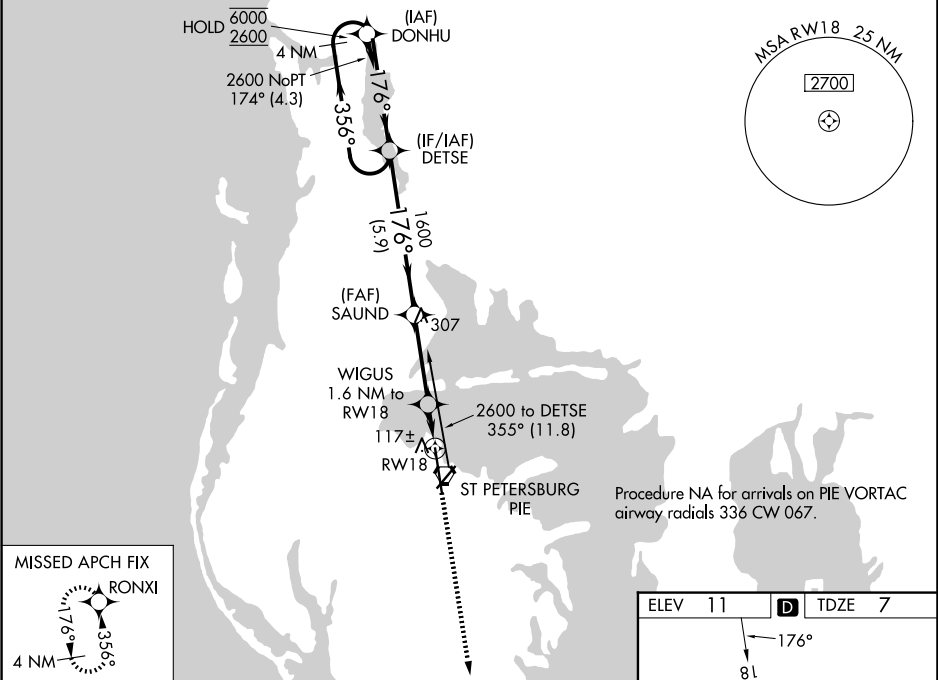

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).		2600	RONXI
DETSE		SAUND		WIGUS	
6000 ← 356°		1600		1.6 NM to RW18	
2600 → 176°		1600		1 NM to RW18	
GP 3.00° TCH 53		520		RW18	
		5.9 NM		3.2 NM	
				0.6	
				1 NM	
CATEGORY	A	B	C	D	
LPV DA	207/18 200 (200-½)				
LNAV/VNAV DA	278/24 271 (300-½)				
LNAV MDA	380/24 373 (400-½)		380/35 373 (400-¾)		
CIRCLING	520-1 509 (600-1)		600-1½ 589 (600-1½)		
			620-2 609 (700-2)		

