



|             |         |          |      |
|-------------|---------|----------|------|
| VOR/DME ACO | APP CRS | Rwy Idg  | 8204 |
| 114.4       | 227°    | TDZE     | 1226 |
| Chan 91     |         | Apt Elev | 1226 |

VOR RWY 23

AKRON-CANTON RGNL(CAK)

|                        |  |       |                                                                            |  |
|------------------------|--|-------|----------------------------------------------------------------------------|--|
| DME or RADAR required. |  | MALSR | MISSED APPROACH: Climb to 3000 then left turn direct BSV VOR/DME and hold. |  |
|                        |  |       |                                                                            |  |

|                |                                     |                                      |                        |                    |
|----------------|-------------------------------------|--------------------------------------|------------------------|--------------------|
| ATIS<br>121.05 | CLEVELAND APP CON *<br>125.5 269.25 | AKRON-CANTON TOWER<br>134.75 279.575 | GND CON<br>121.7 348.6 | CLNC DEL<br>132.05 |
|----------------|-------------------------------------|--------------------------------------|------------------------|--------------------|

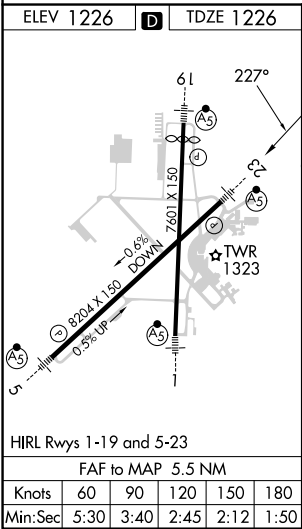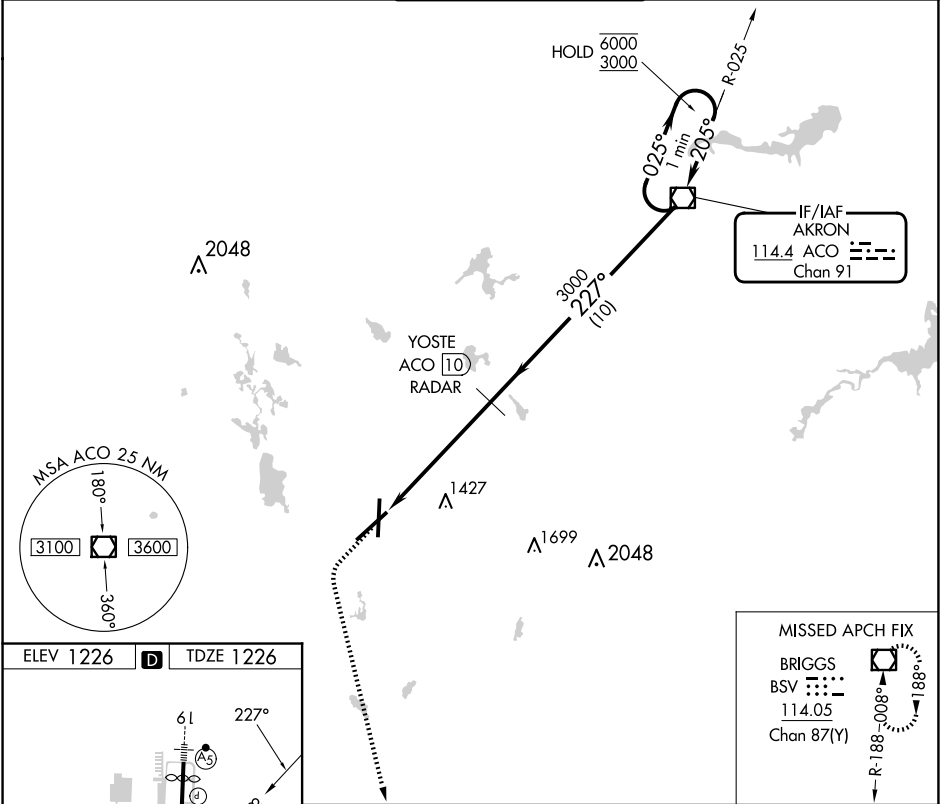

|          |  |                     |  |                                       |  |                        |  |                               |  |
|----------|--|---------------------|--|---------------------------------------|--|------------------------|--|-------------------------------|--|
| 3000     |  | BSV                 |  | YOSTE<br>ACO <span>10</span><br>RADAR |  | ACO<br>VOR/DME         |  | One Minute<br>Holding Pattern |  |
|          |  |                     |  |                                       |  |                        |  |                               |  |
| CATEGORY |  | A                   |  | B                                     |  | C                      |  | D                             |  |
| S-23     |  | 1680/24 454 (500-½) |  | 1680/40<br>454 (500-¾)                |  | 1680/50<br>454 (500-1) |  |                               |  |
| CIRCLING |  | 1760-1 534 (600-1)  |  | 1780-1½<br>554 (600-1½)               |  | 1800-2<br>574 (600-2)  |  |                               |  |