

LOC/DME I-CIZ 110.15 Chan 38 (Y)	APP CRS 186°	Rwy Ldg 10000 TDZE 889 Apt Elev 896
--	------------------------	--

ILS or LOC RWY 18L
CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. From BYRAN, CRSLY, LEWIN, or NXHAL.

DME or RADAR required. RADAR required for procedure entry at SPUDR.




T	Simultaneous approach authorized. For inop ALS, increase
A NA	S-LOC 18L Cat C and D visibility to $1\frac{3}{8}$ SM.

MALSR




MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 on heading 120° and FLM VOR/DME R-339 to FLM VOR/DME and hold.

D-ATIS 134.375	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (18L/36R) 118.3 (9/27. 18C/36C)	GND CON 121.7
--------------------------	--	---	-------------------------

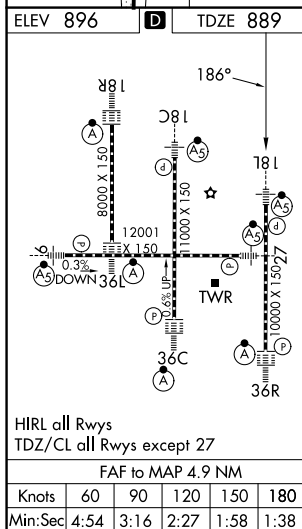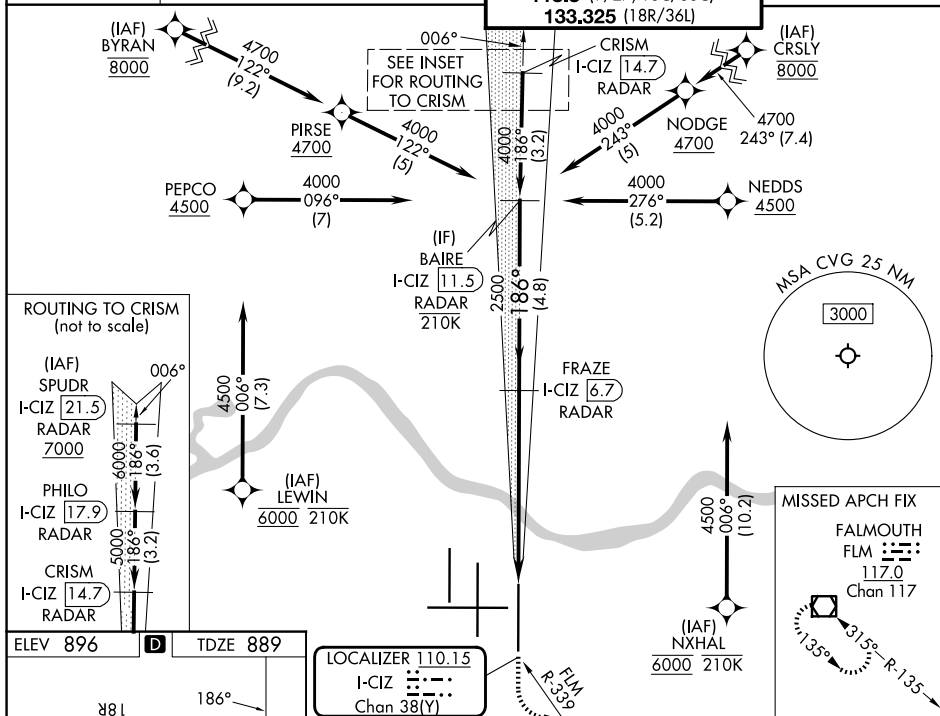

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

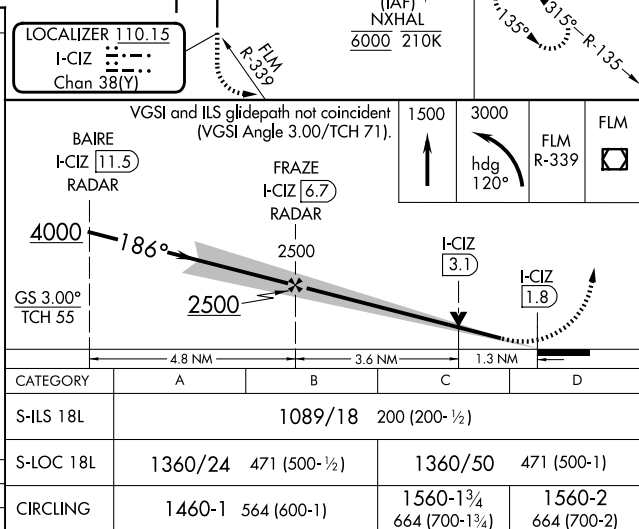

CATEGORY	A	B	C	D
S-ILS 18L	1089/18 200 (200-½)			
S-LOC 18L	1360/24 471 (500-½)		1360/50 471 (500-1)	
CIRCLING	1460-1 564 (600-1)		1560-1¾ 664 (700-1¾)	1560-2 664 (700-2)